

FIG. 1 is a perspective view of a shoe sole assembly 10, showing a sole 12 and a sole insert 14. The sole 12 is formed of a material having a top surface 16 and a bottom surface 18. The sole insert 14 is formed of a material having a top surface 20 and a bottom surface 22. The sole insert 14 is positioned between the sole 12 and the sole 12, and is secured to the sole 12 by a plurality of fasteners 24. The sole insert 14 is formed of a material having a top surface 20 and a bottom surface 22. The sole insert 14 is positioned between the sole 12 and the sole 12, and is secured to the sole 12 by a plurality of fasteners 24.

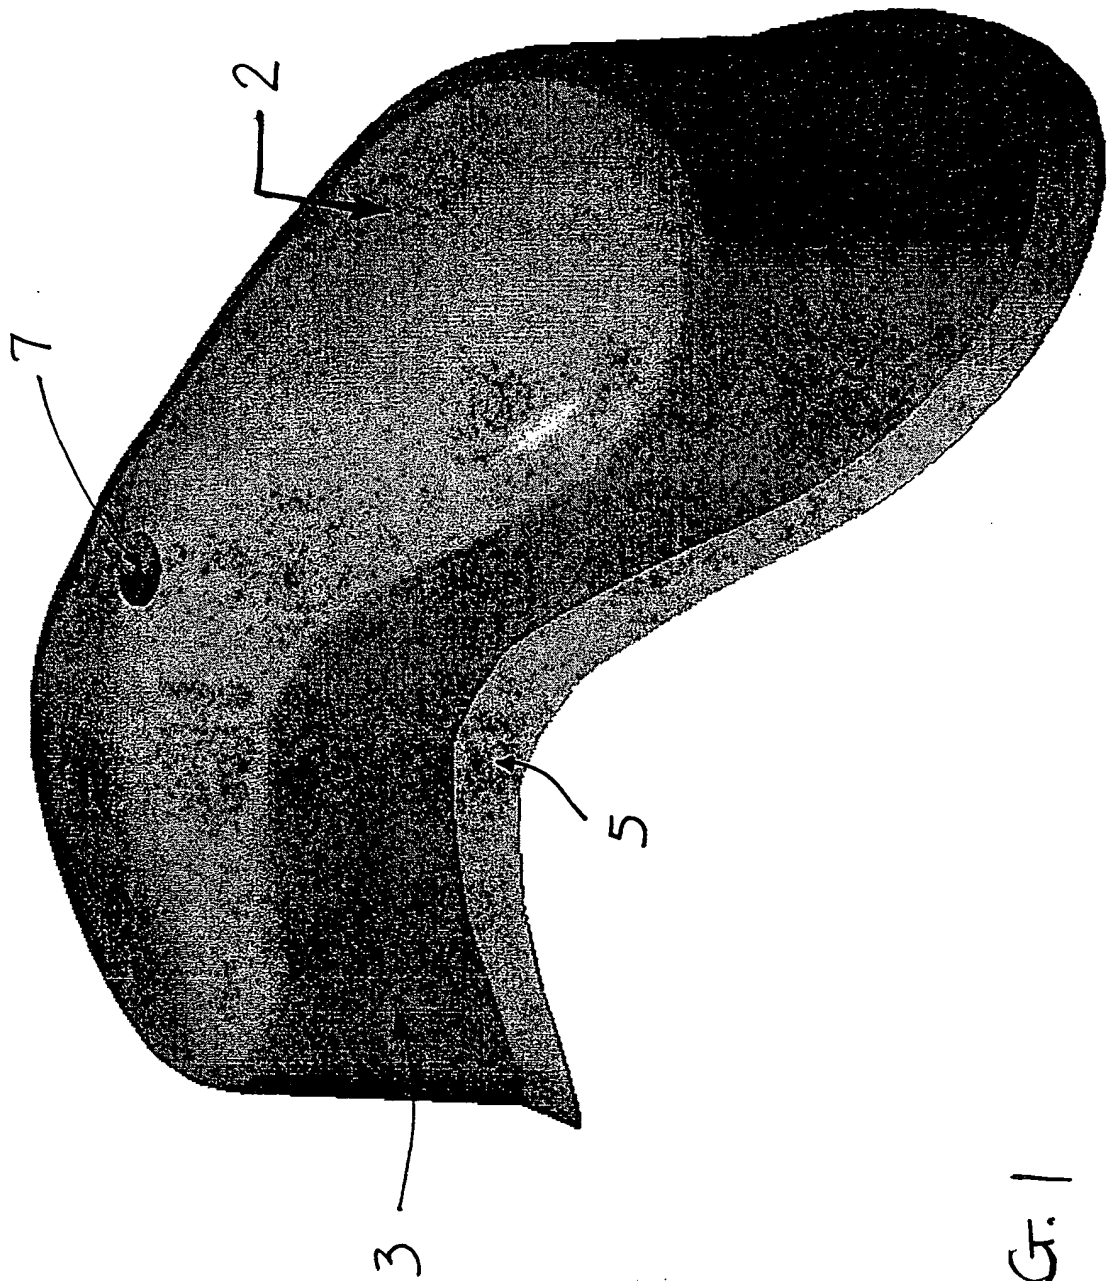


FIG. 1

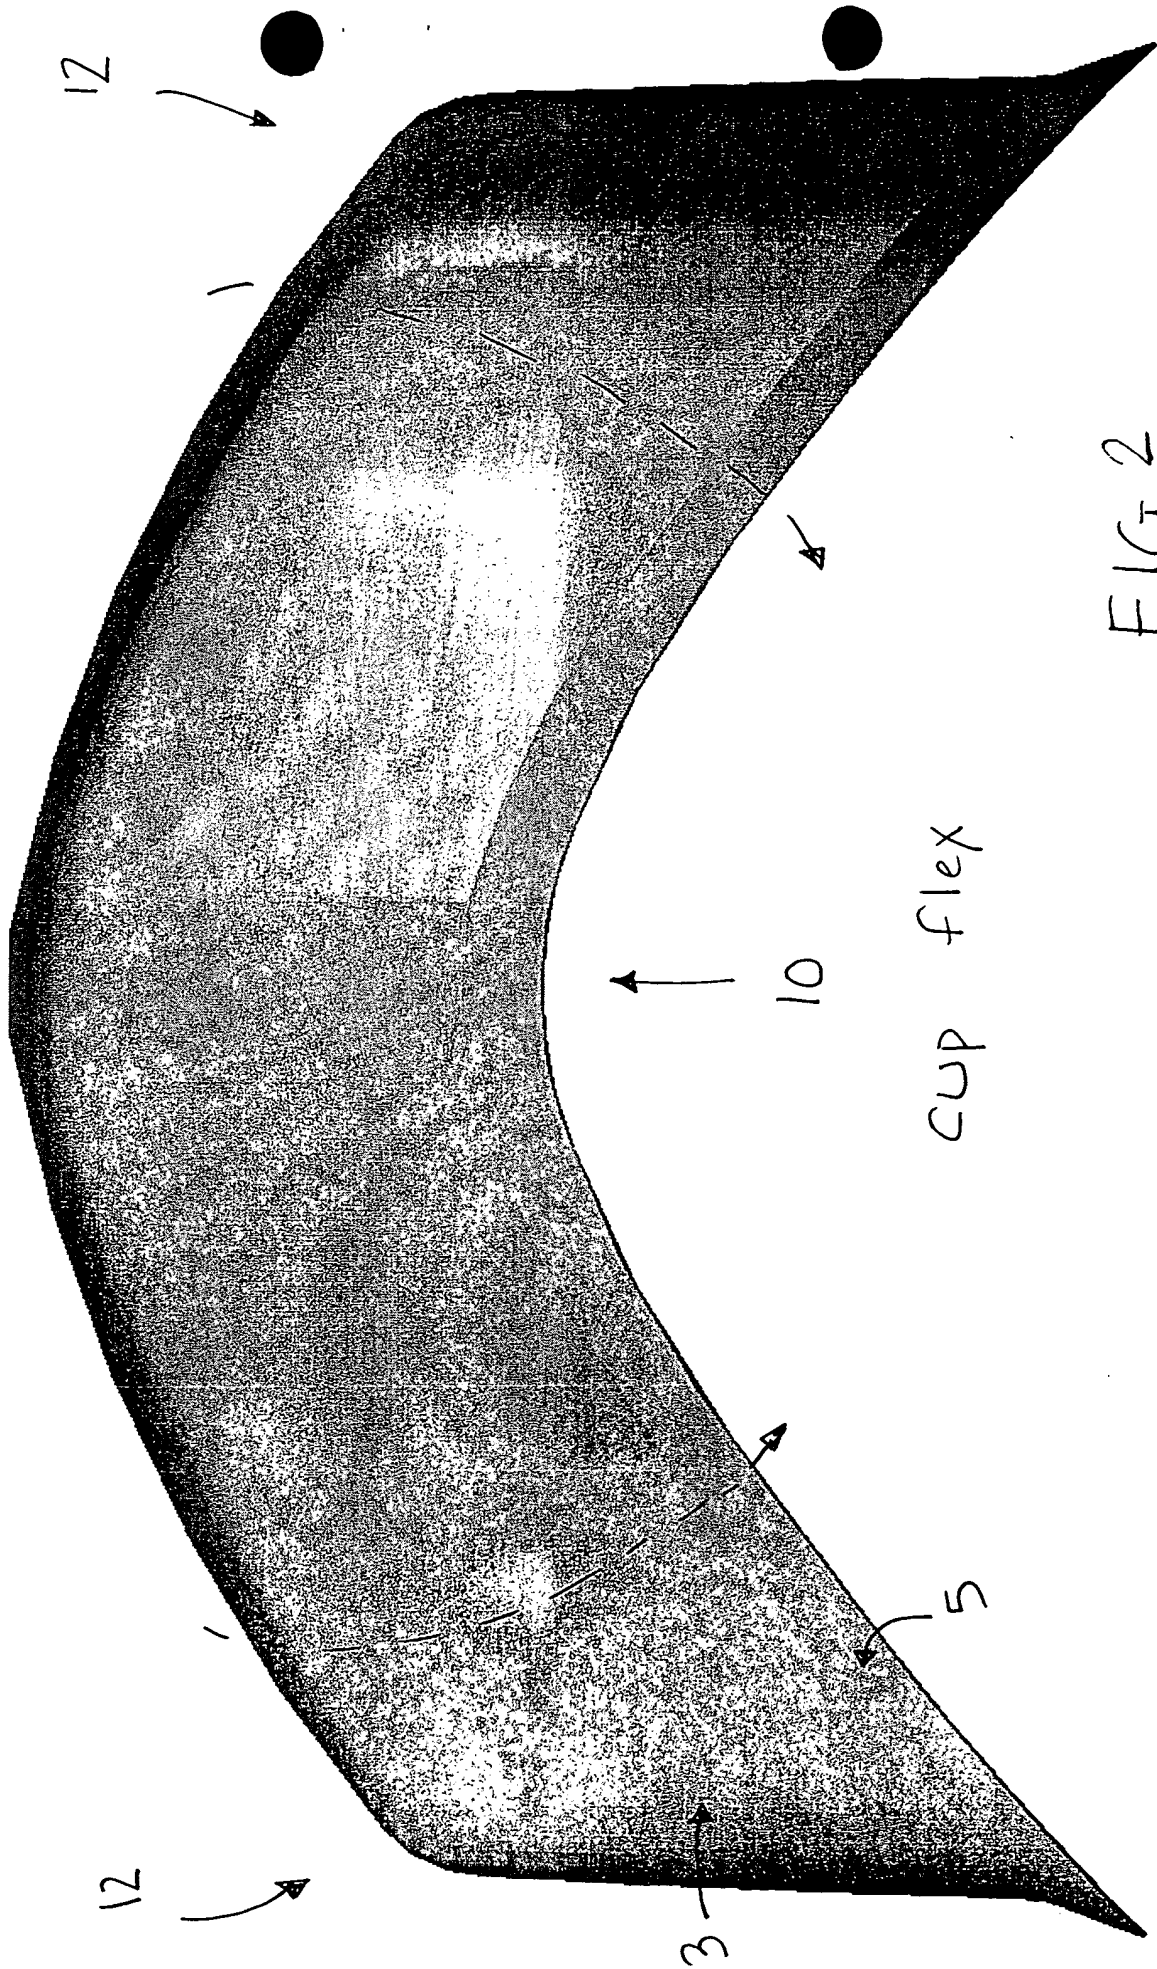


FIG. 2

FIG. 3 is a top view of the shoe insert of FIG. 1, showing the upper surface 2, the side wall 5, and the central opening 7.

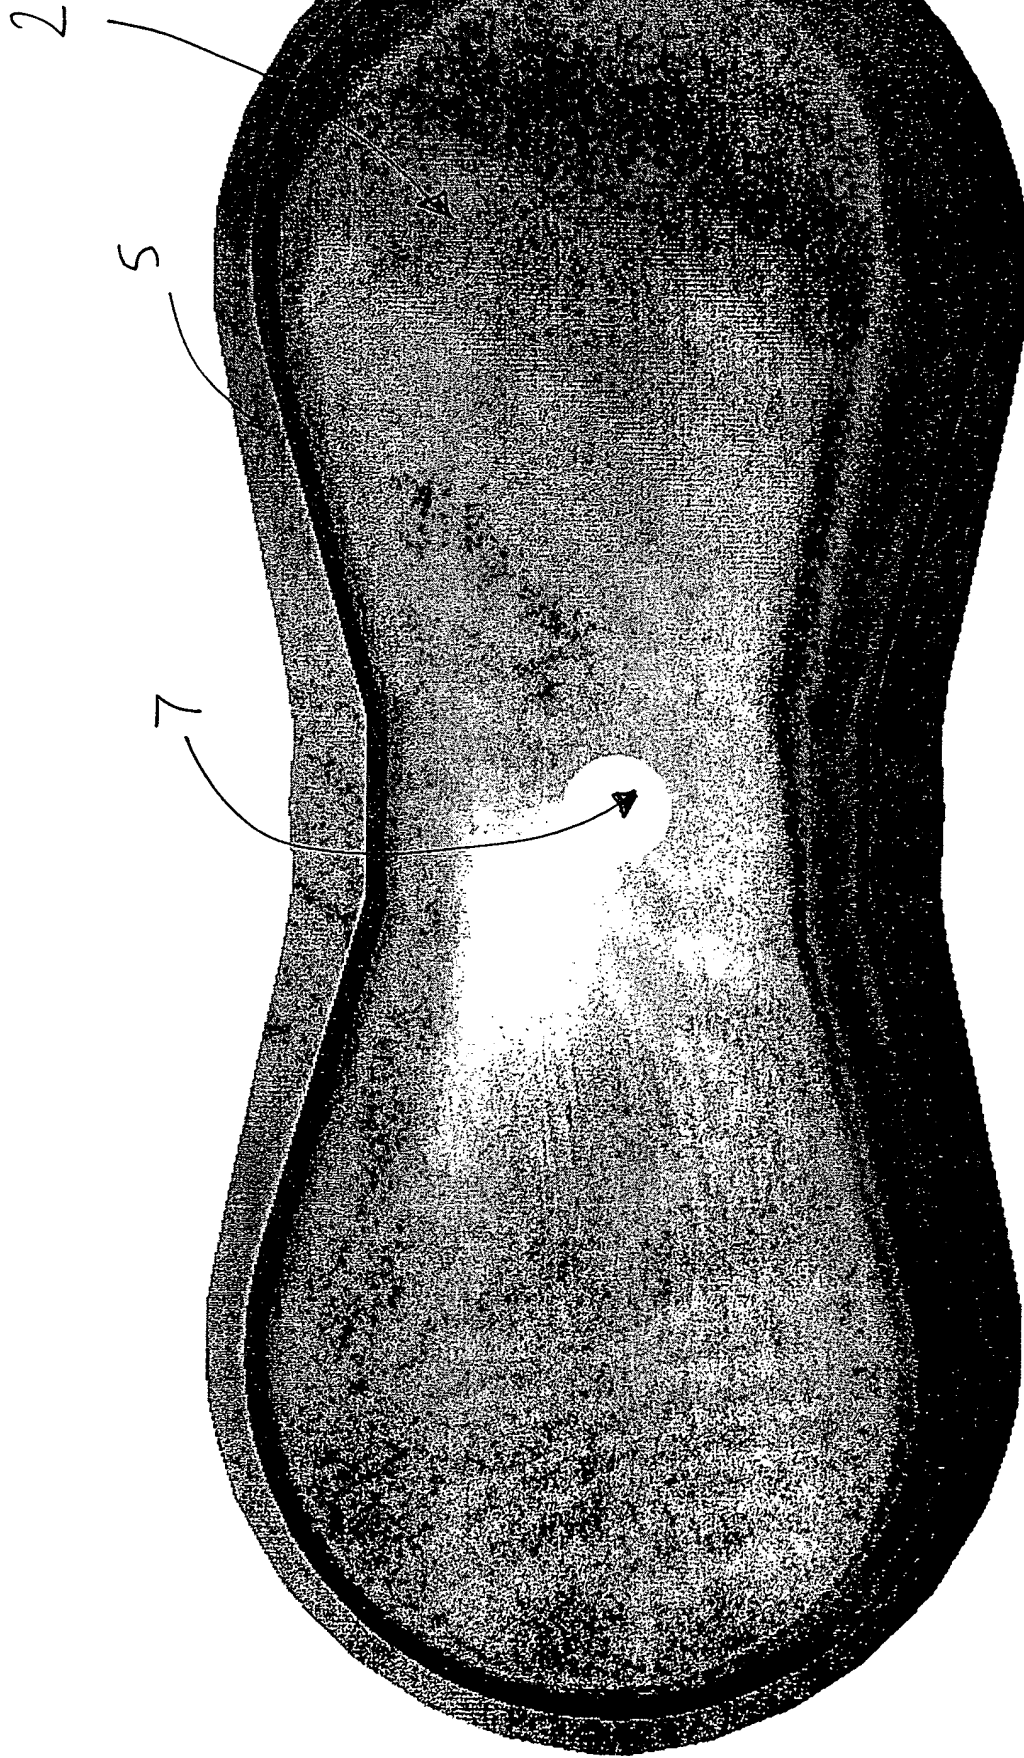


FIG. 3

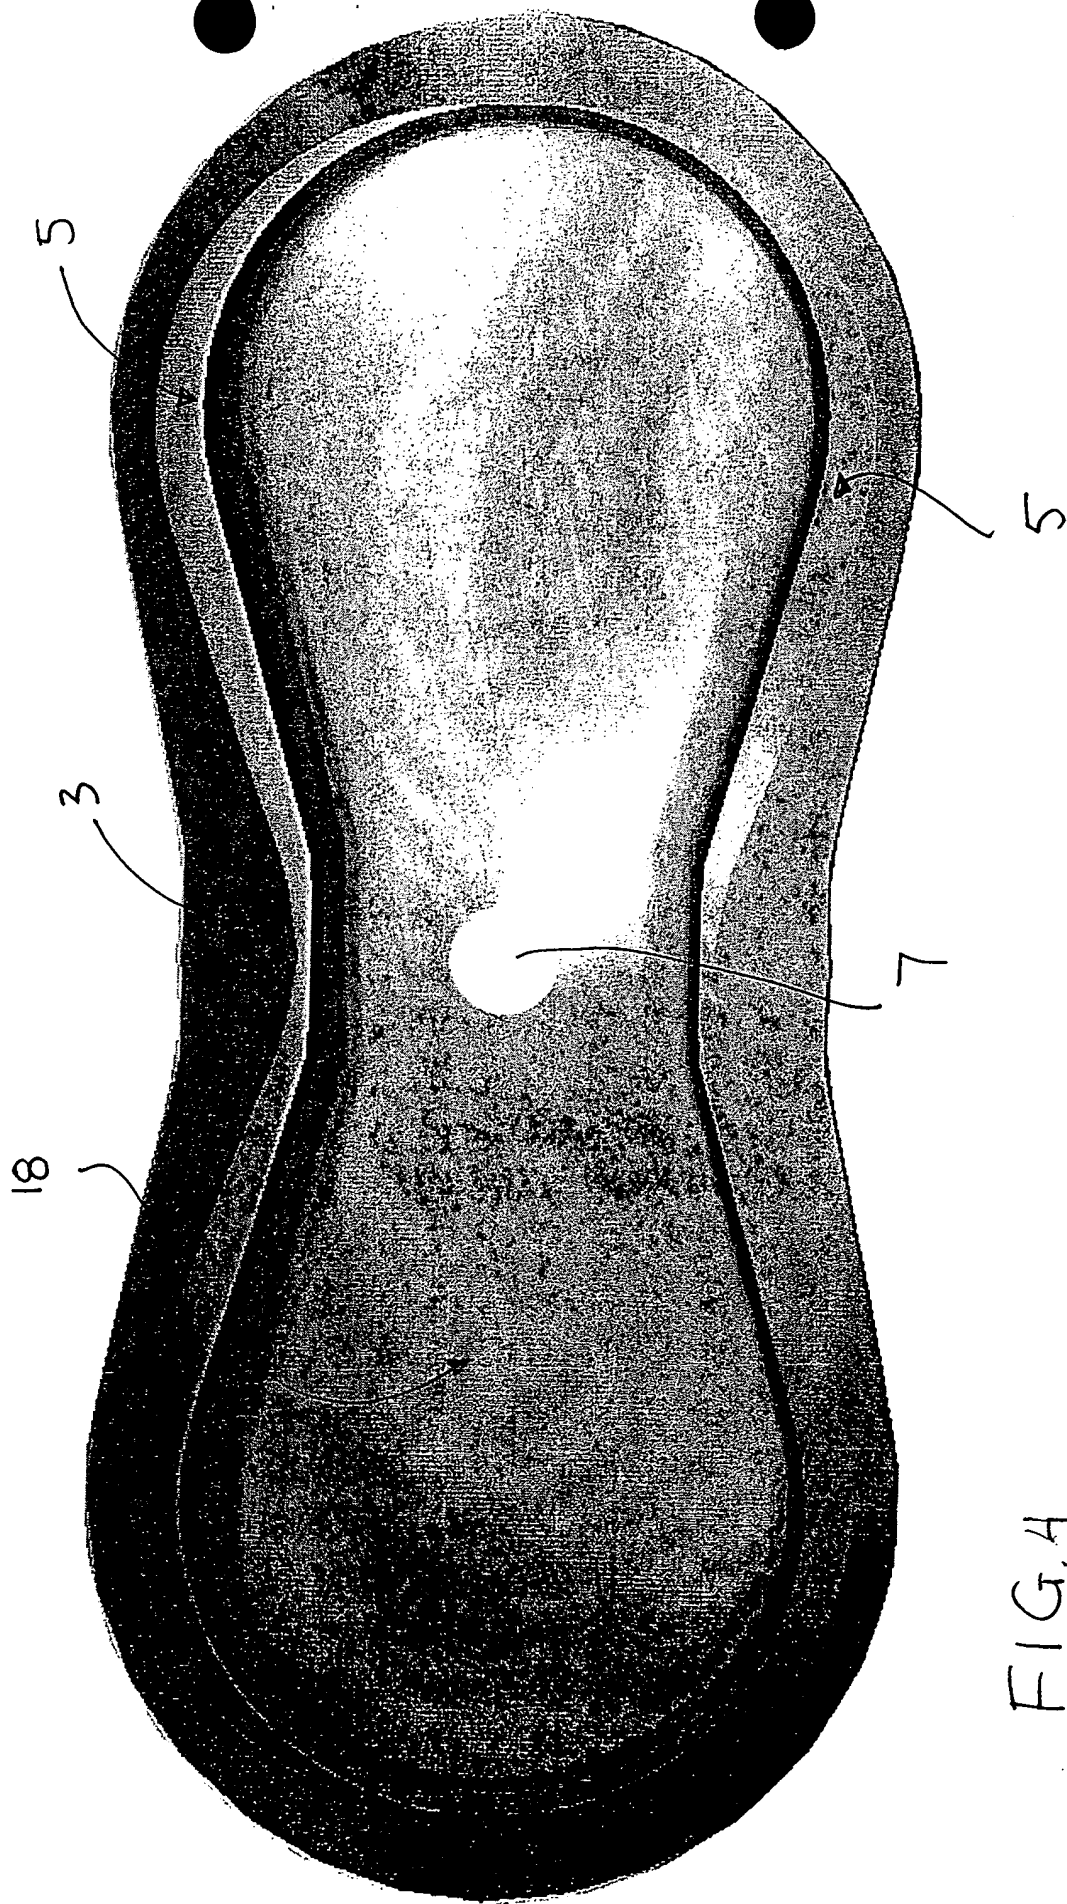


FIG. 4

FIG. 5 is a top view of the sole of a shoe showing the arrangement of the air passages and the air inlet valve.

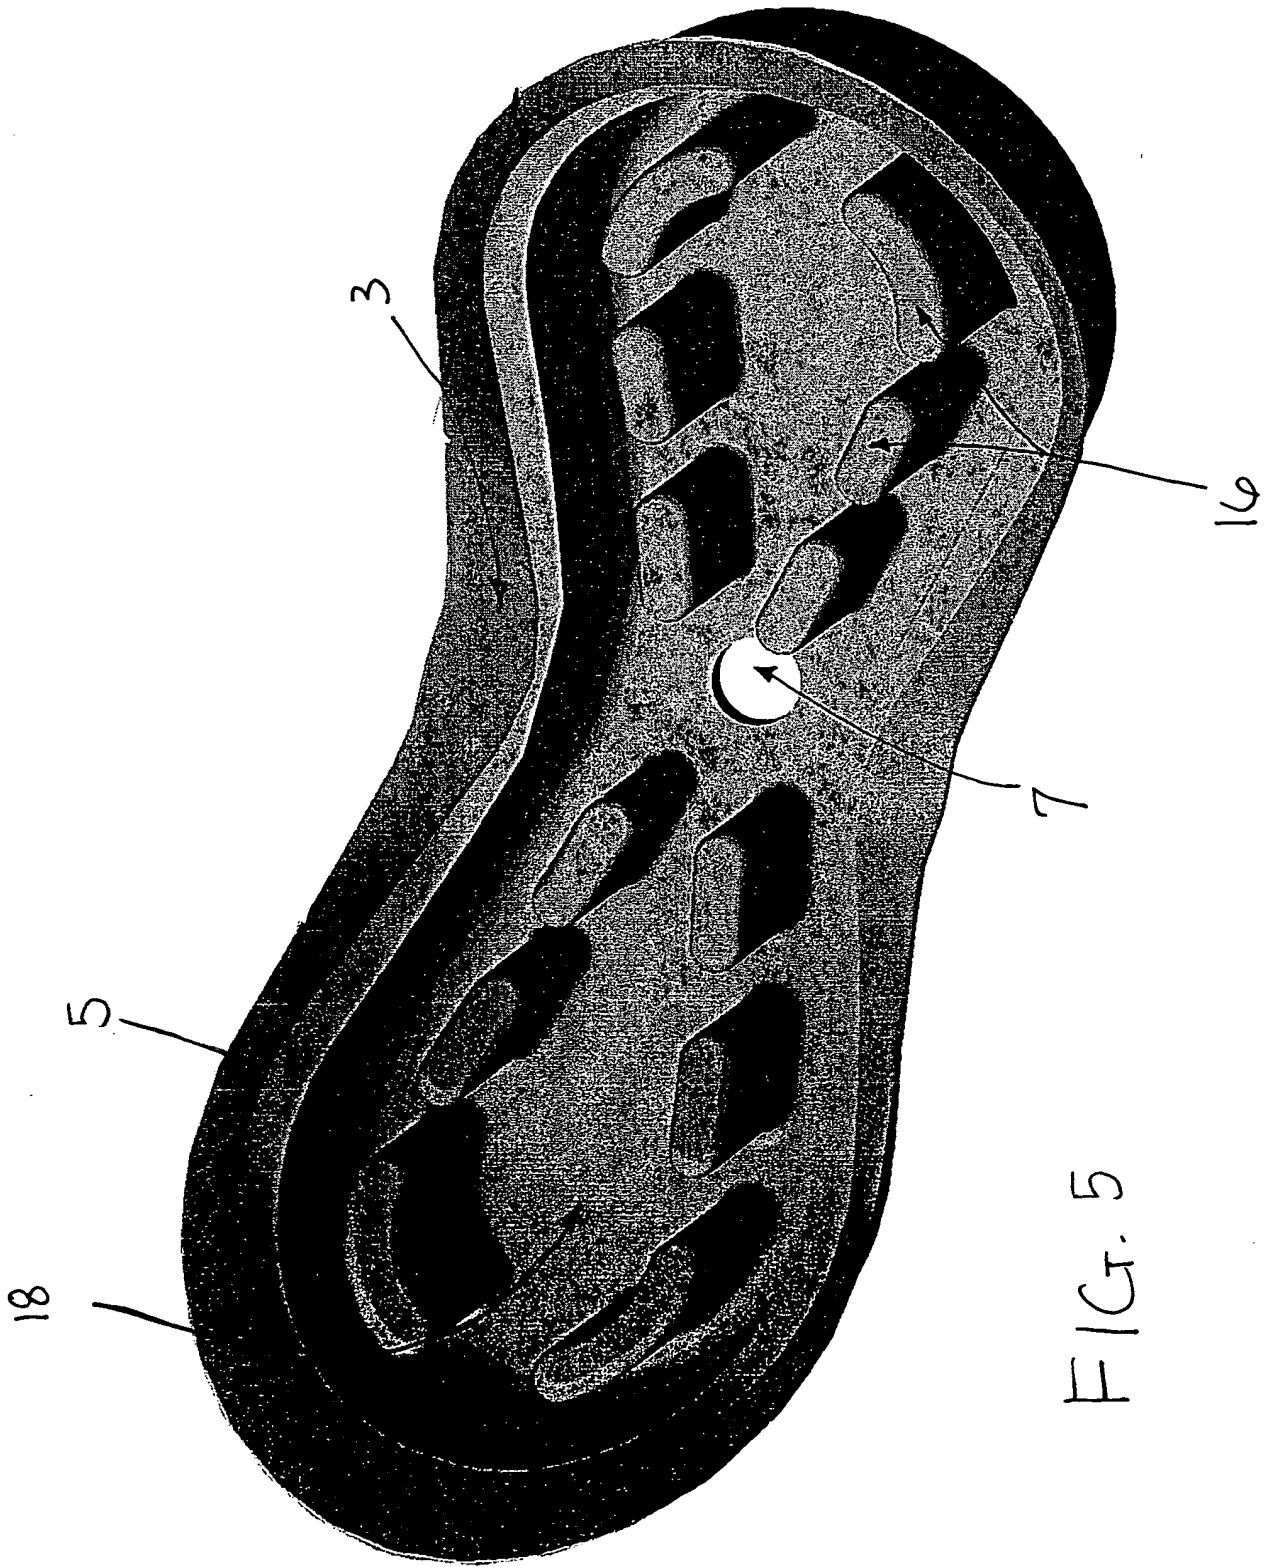


FIG. 5

FIG. 6 is a top view of the shoe sole assembly 100, showing the sole plate 102, the sole cushion 104, and the sole cushion 106.

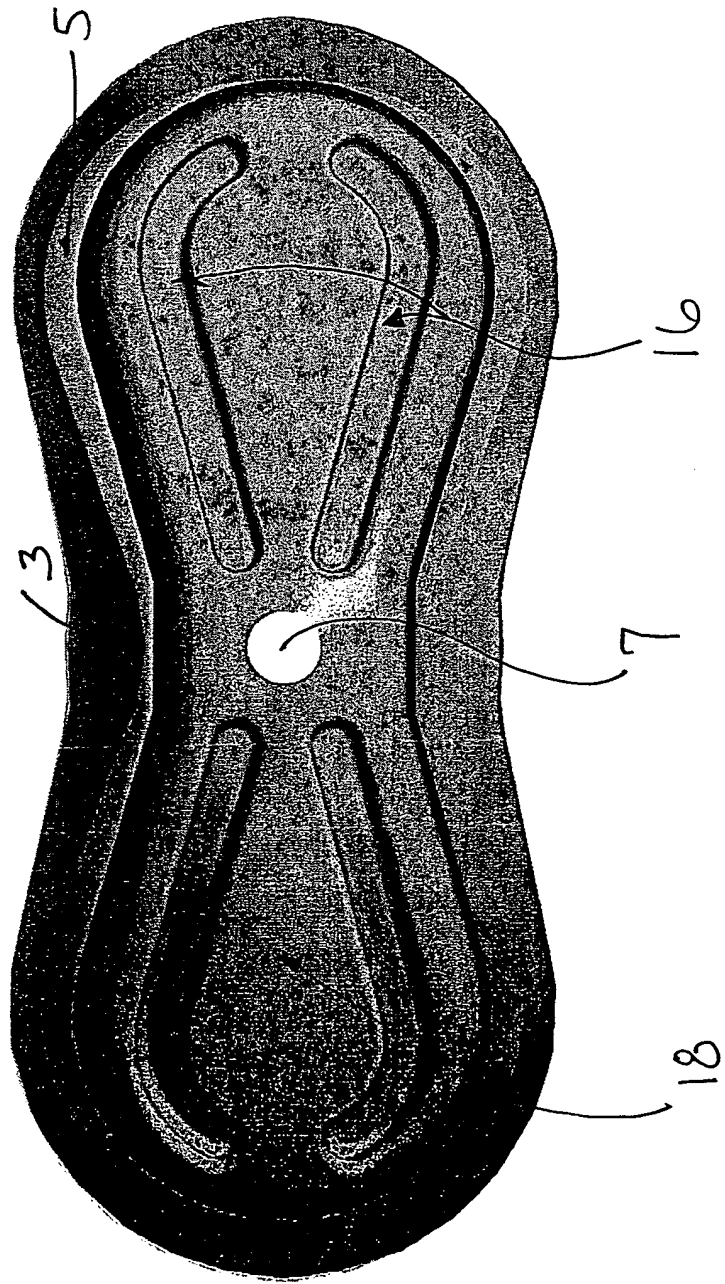


FIG. 6

FIG. 7.

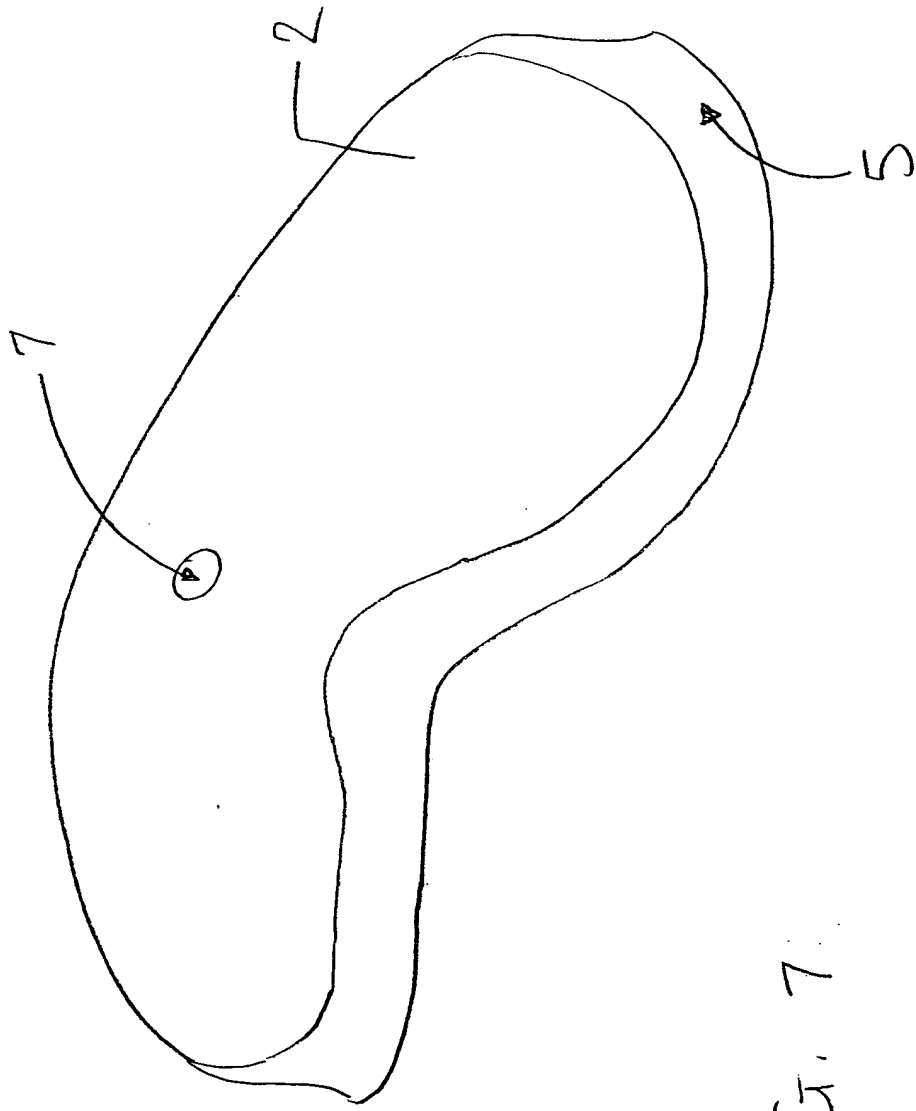


FIG. 8 is a perspective view of the device of FIG. 7, showing the device in a closed position.

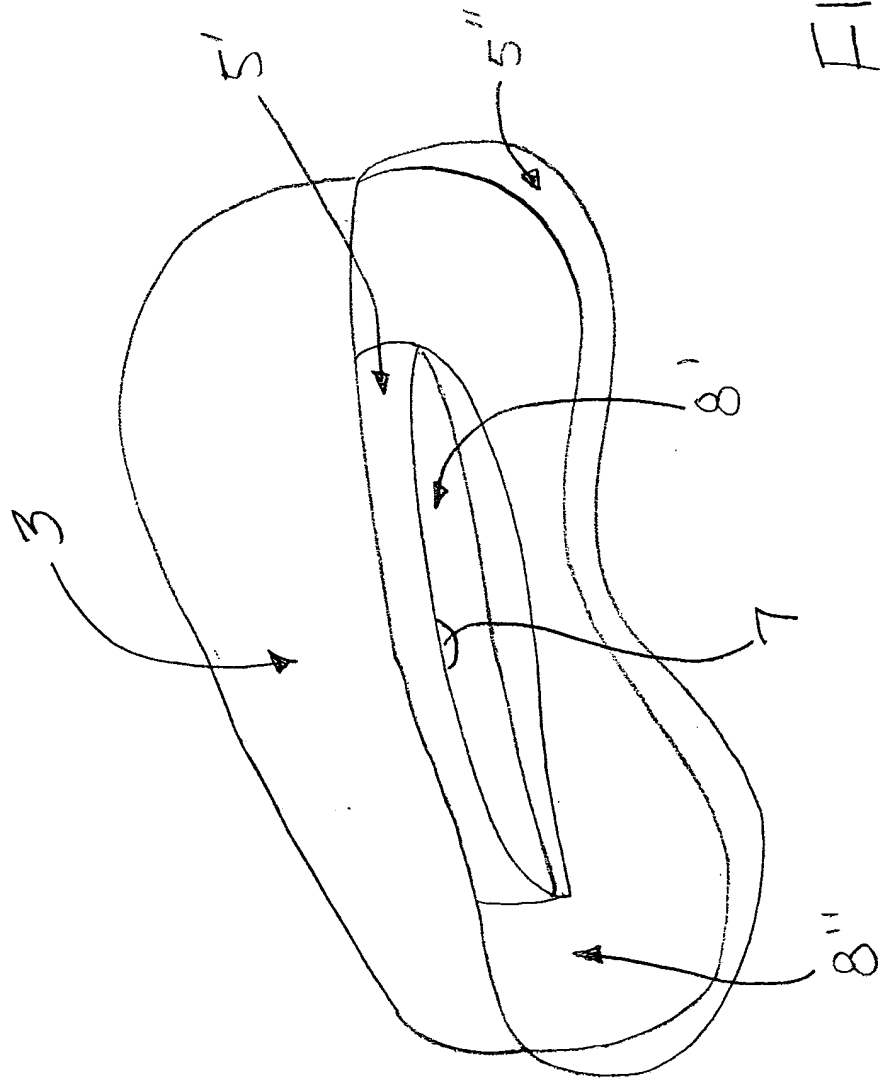


FIG. 8



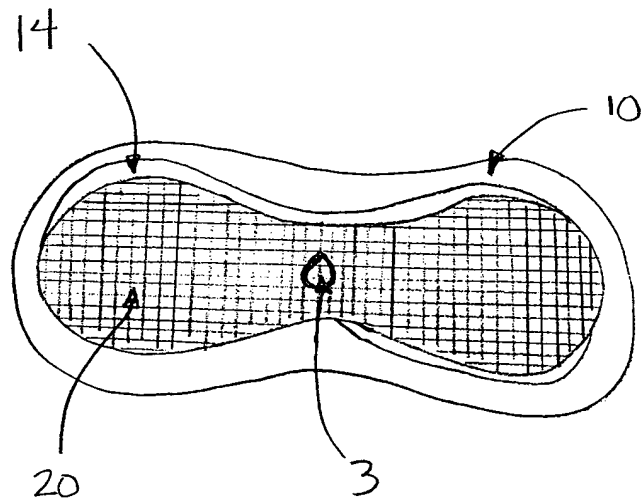


FIG. 9

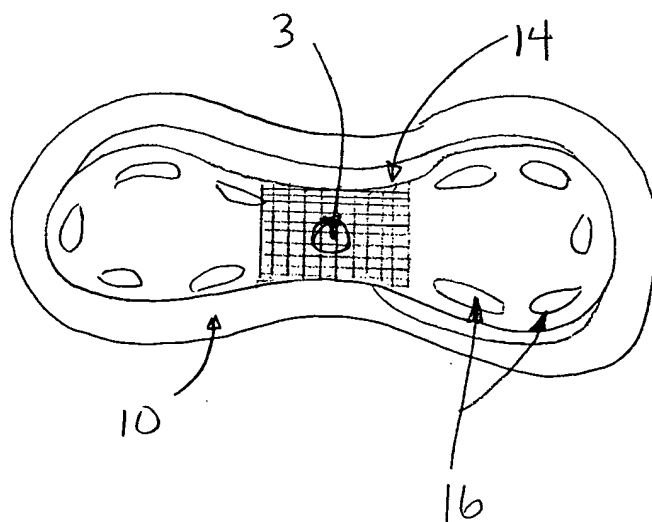


FIG. 10

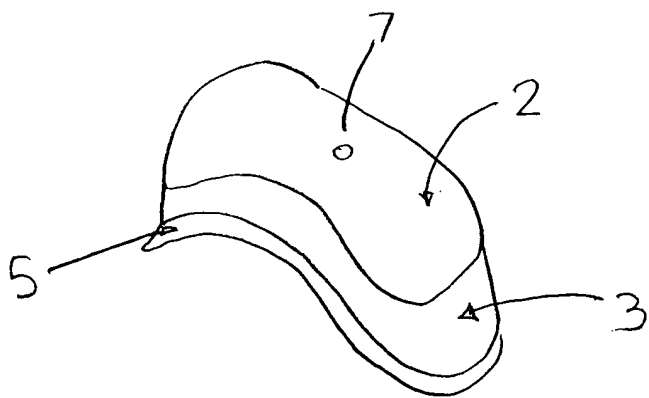


FIG. 11

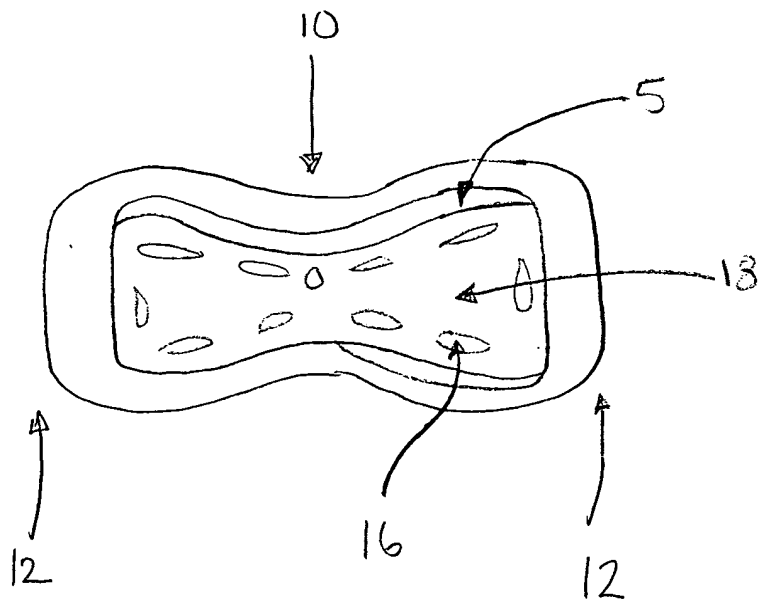


FIG. 12

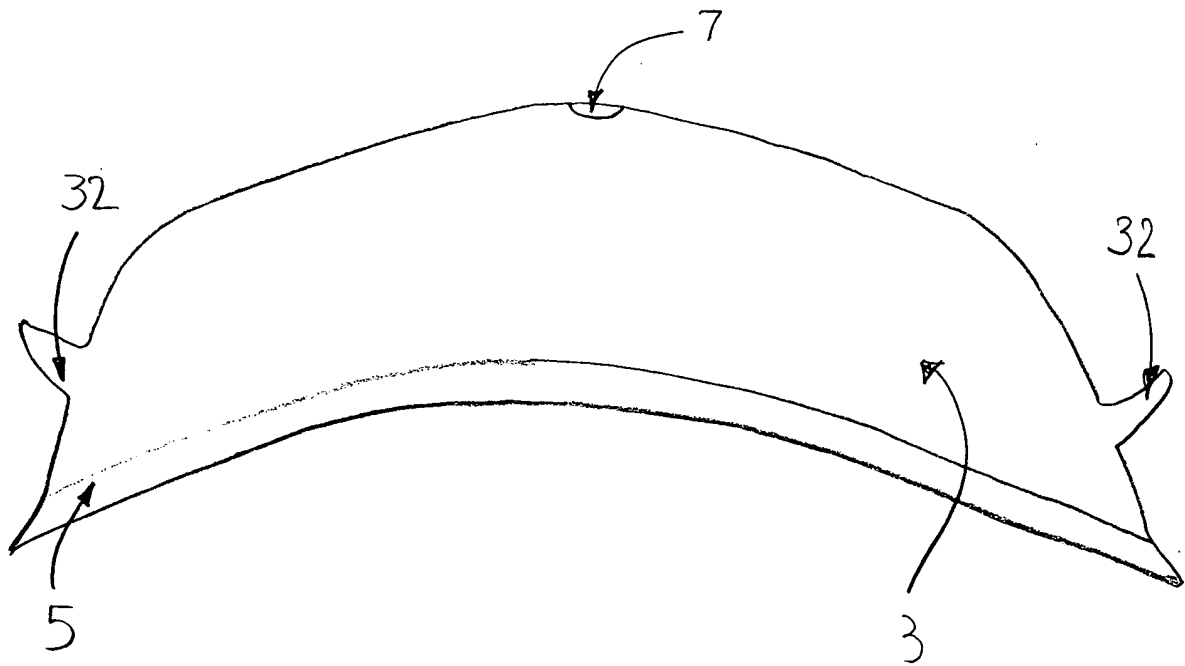


FIG. 13

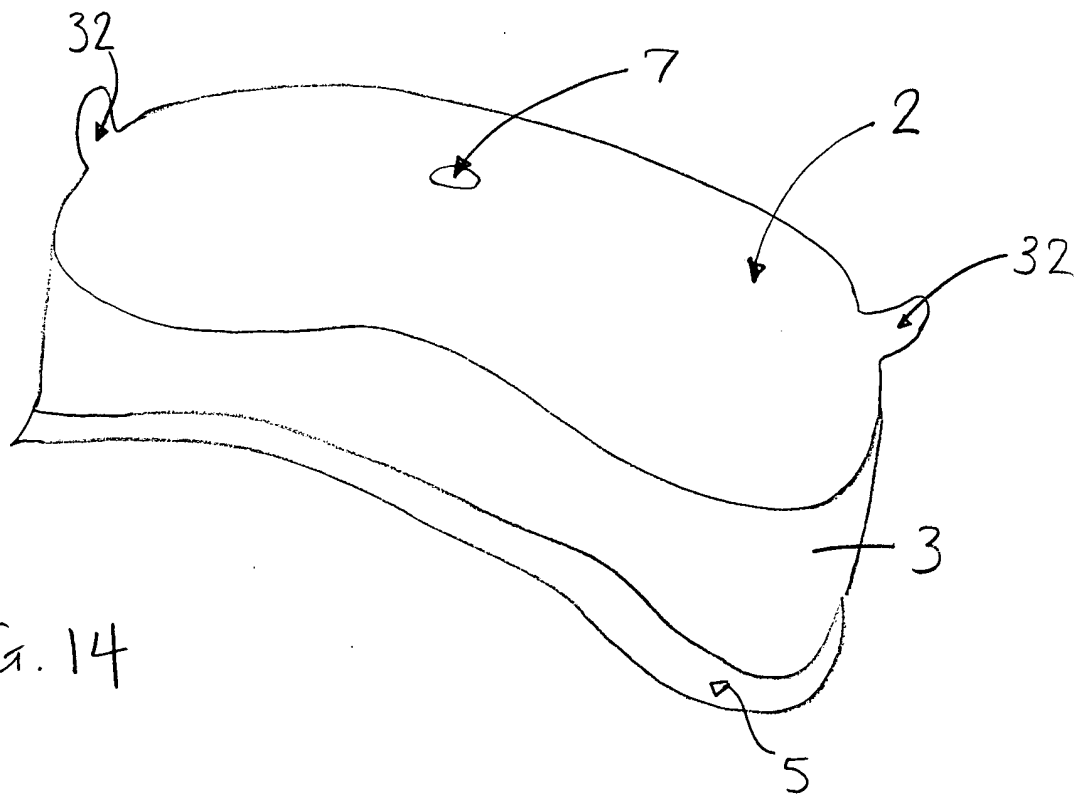


FIG. 14

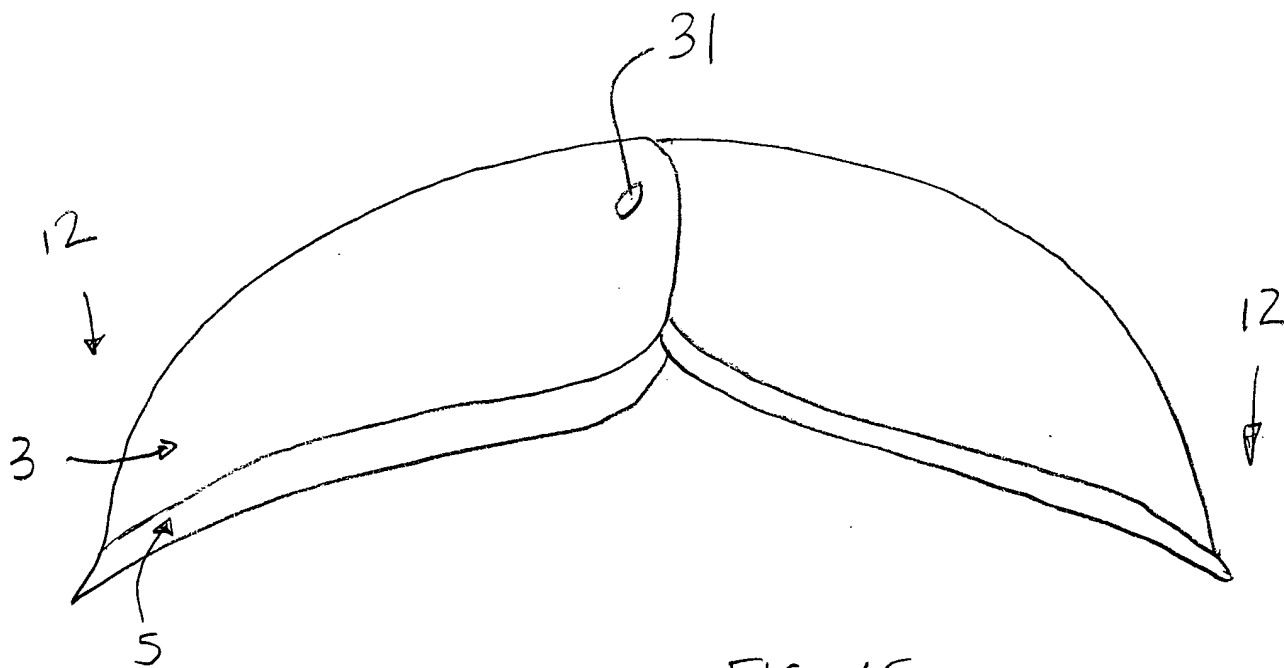


FIG. 15

FIG. 16

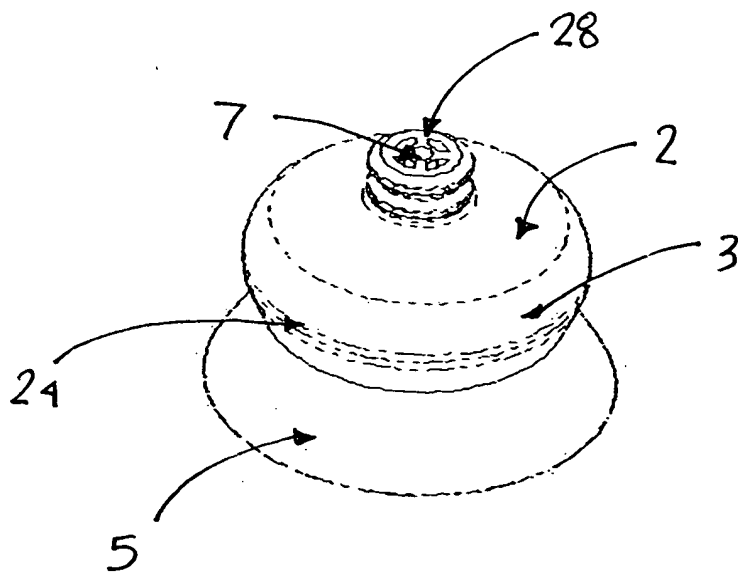


FIG. 17


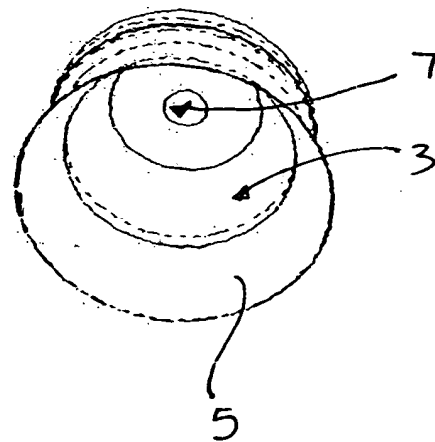


FIG. 18

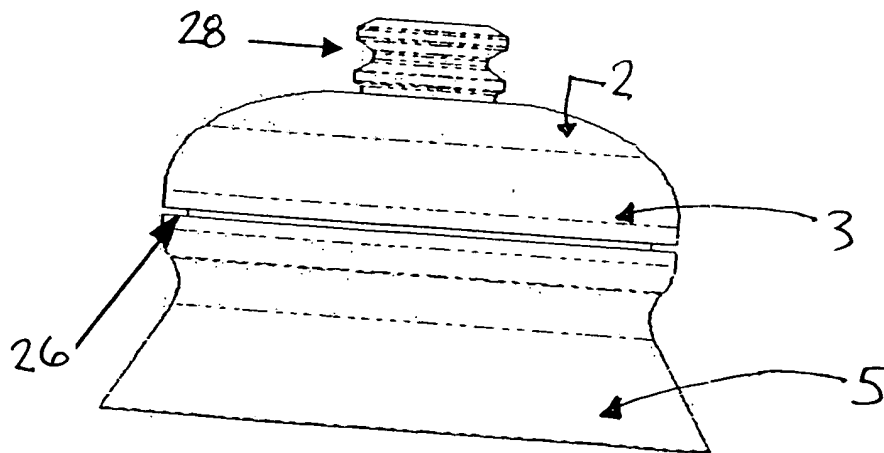

2025-03-10 15:55:00

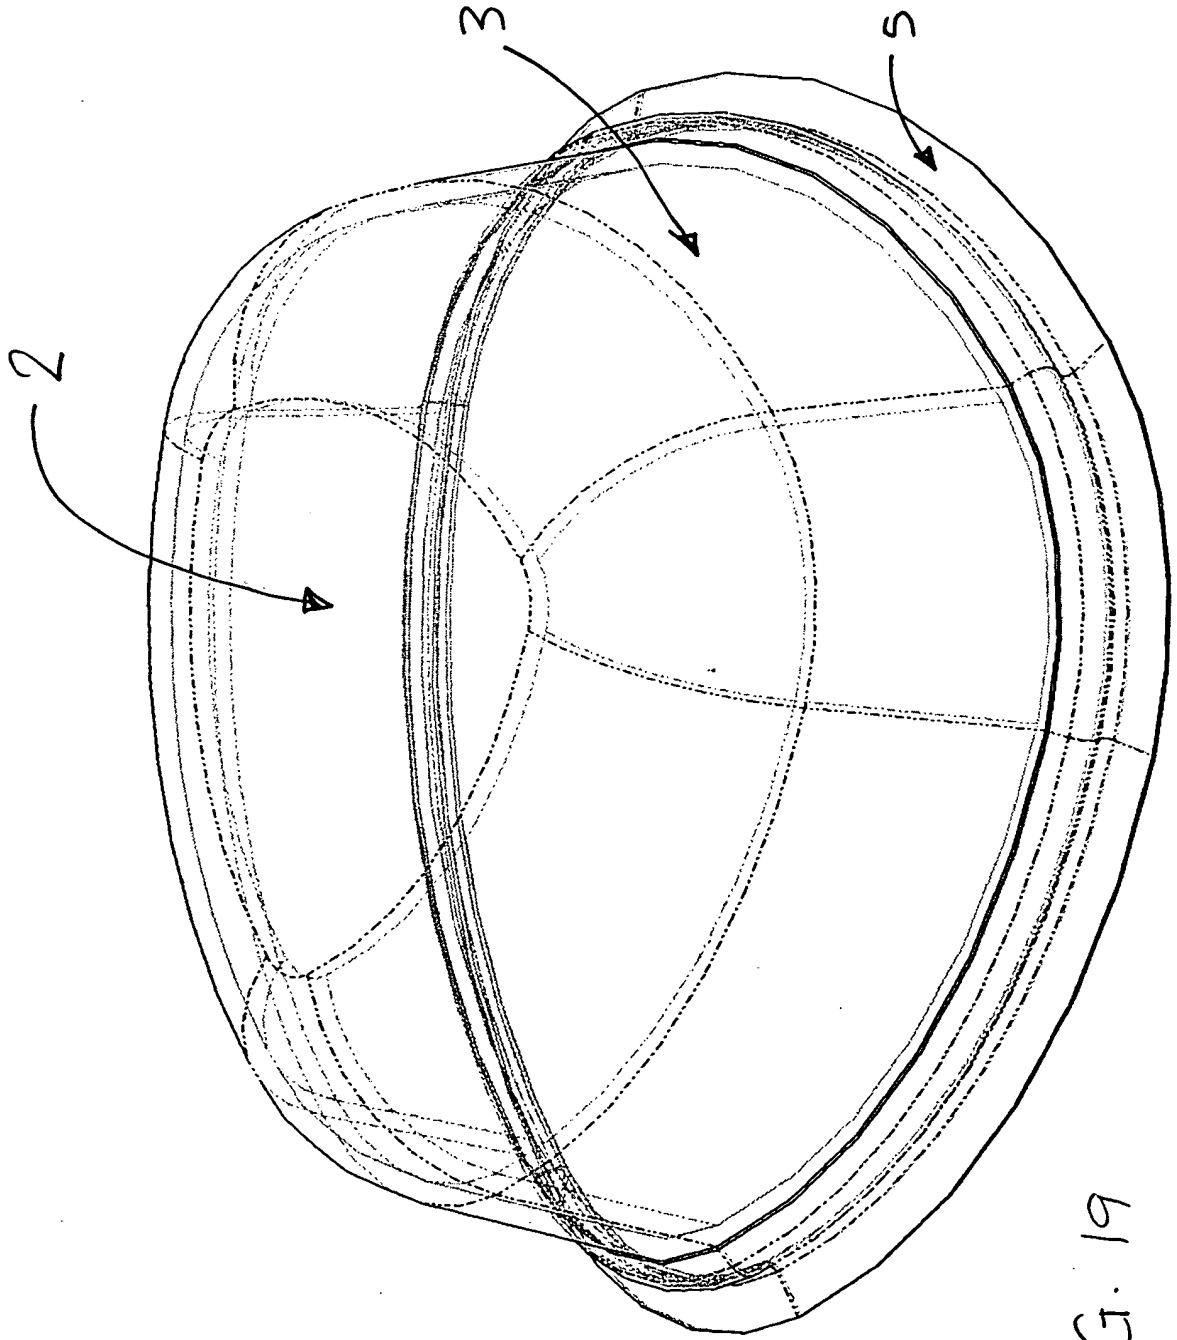


FIG. 19

FIG. 20

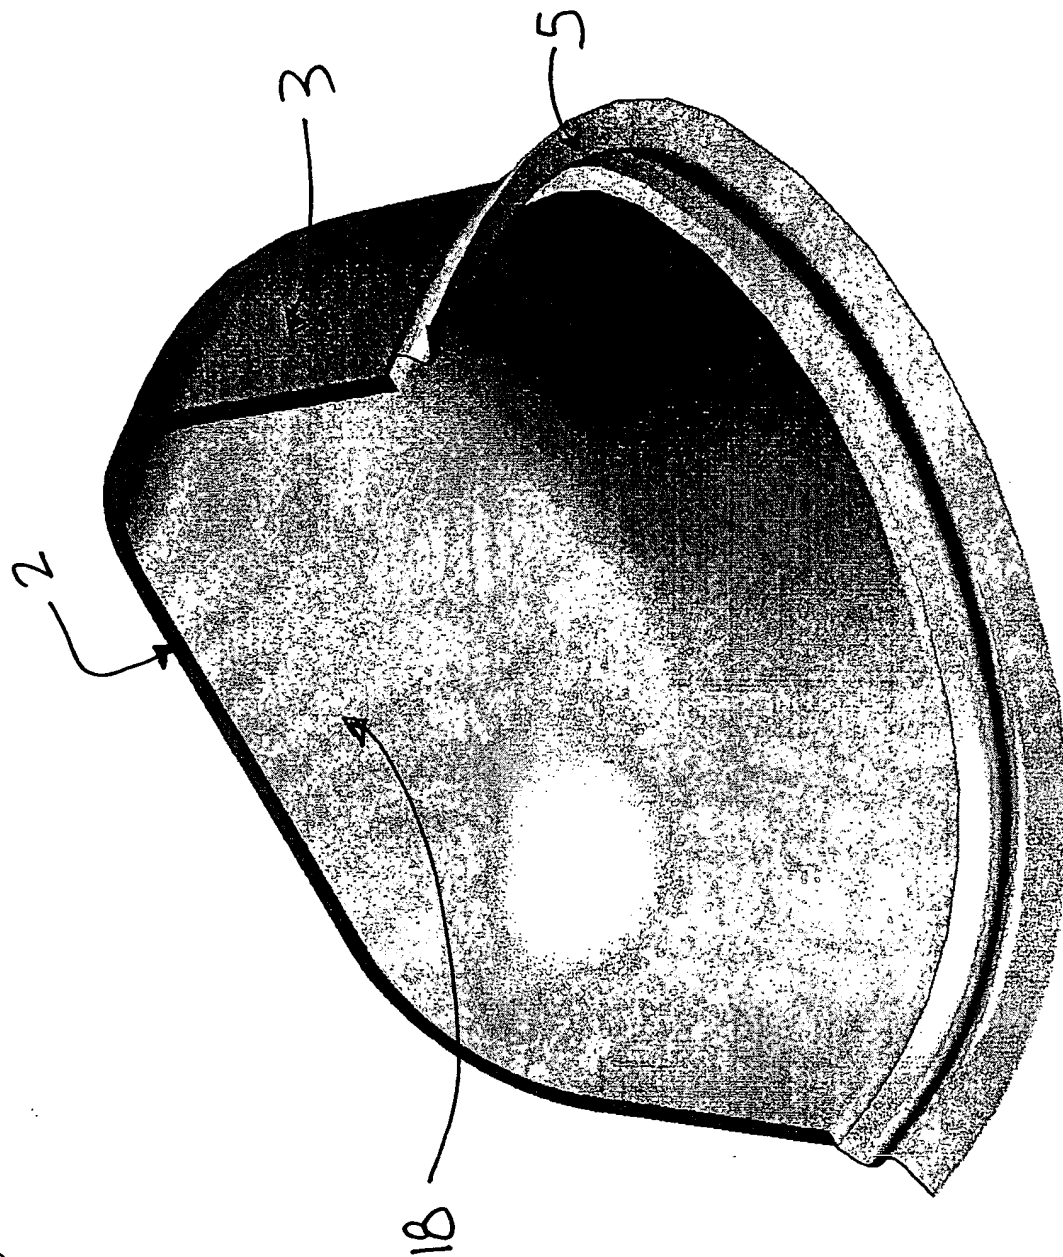


FIG. 21a

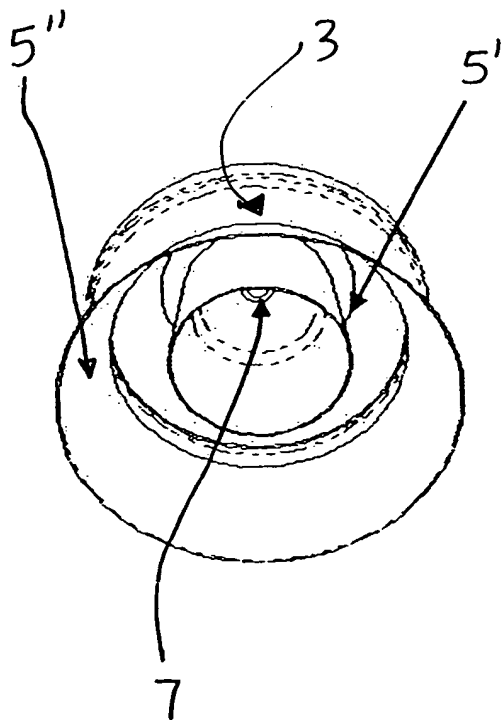


FIG. 21b

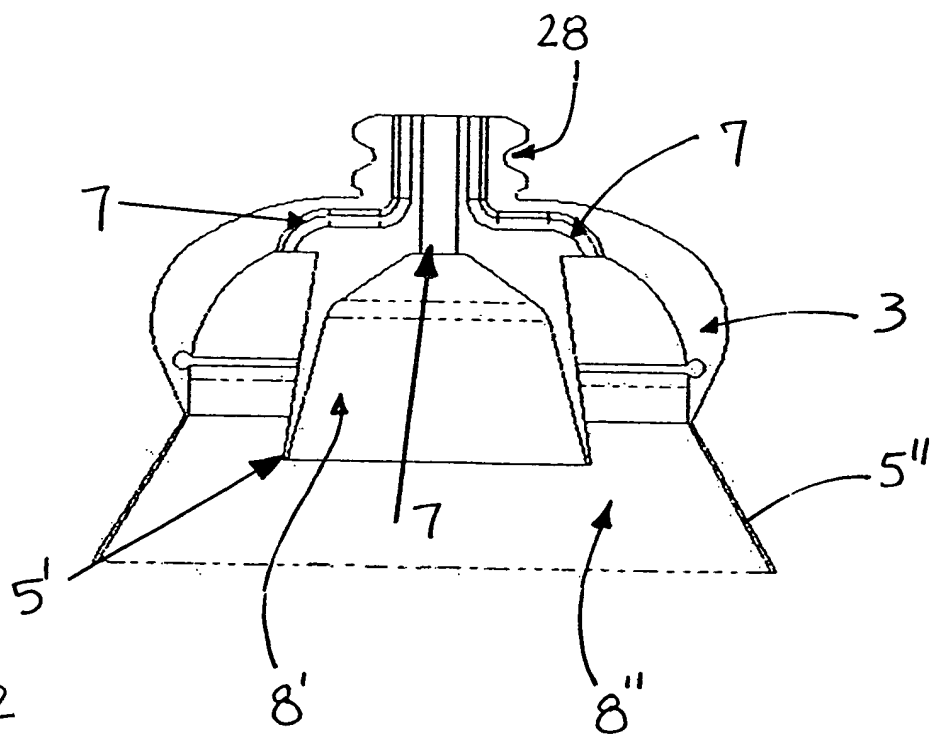
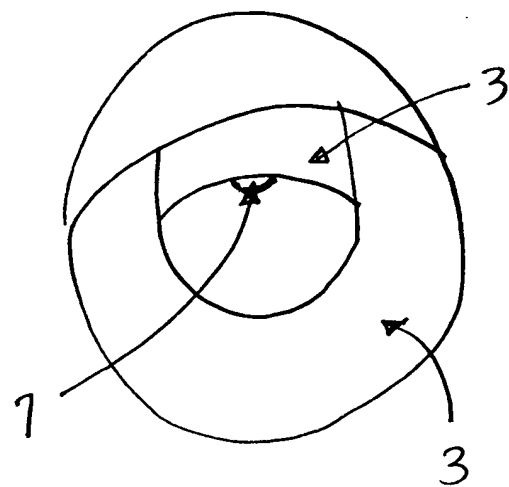
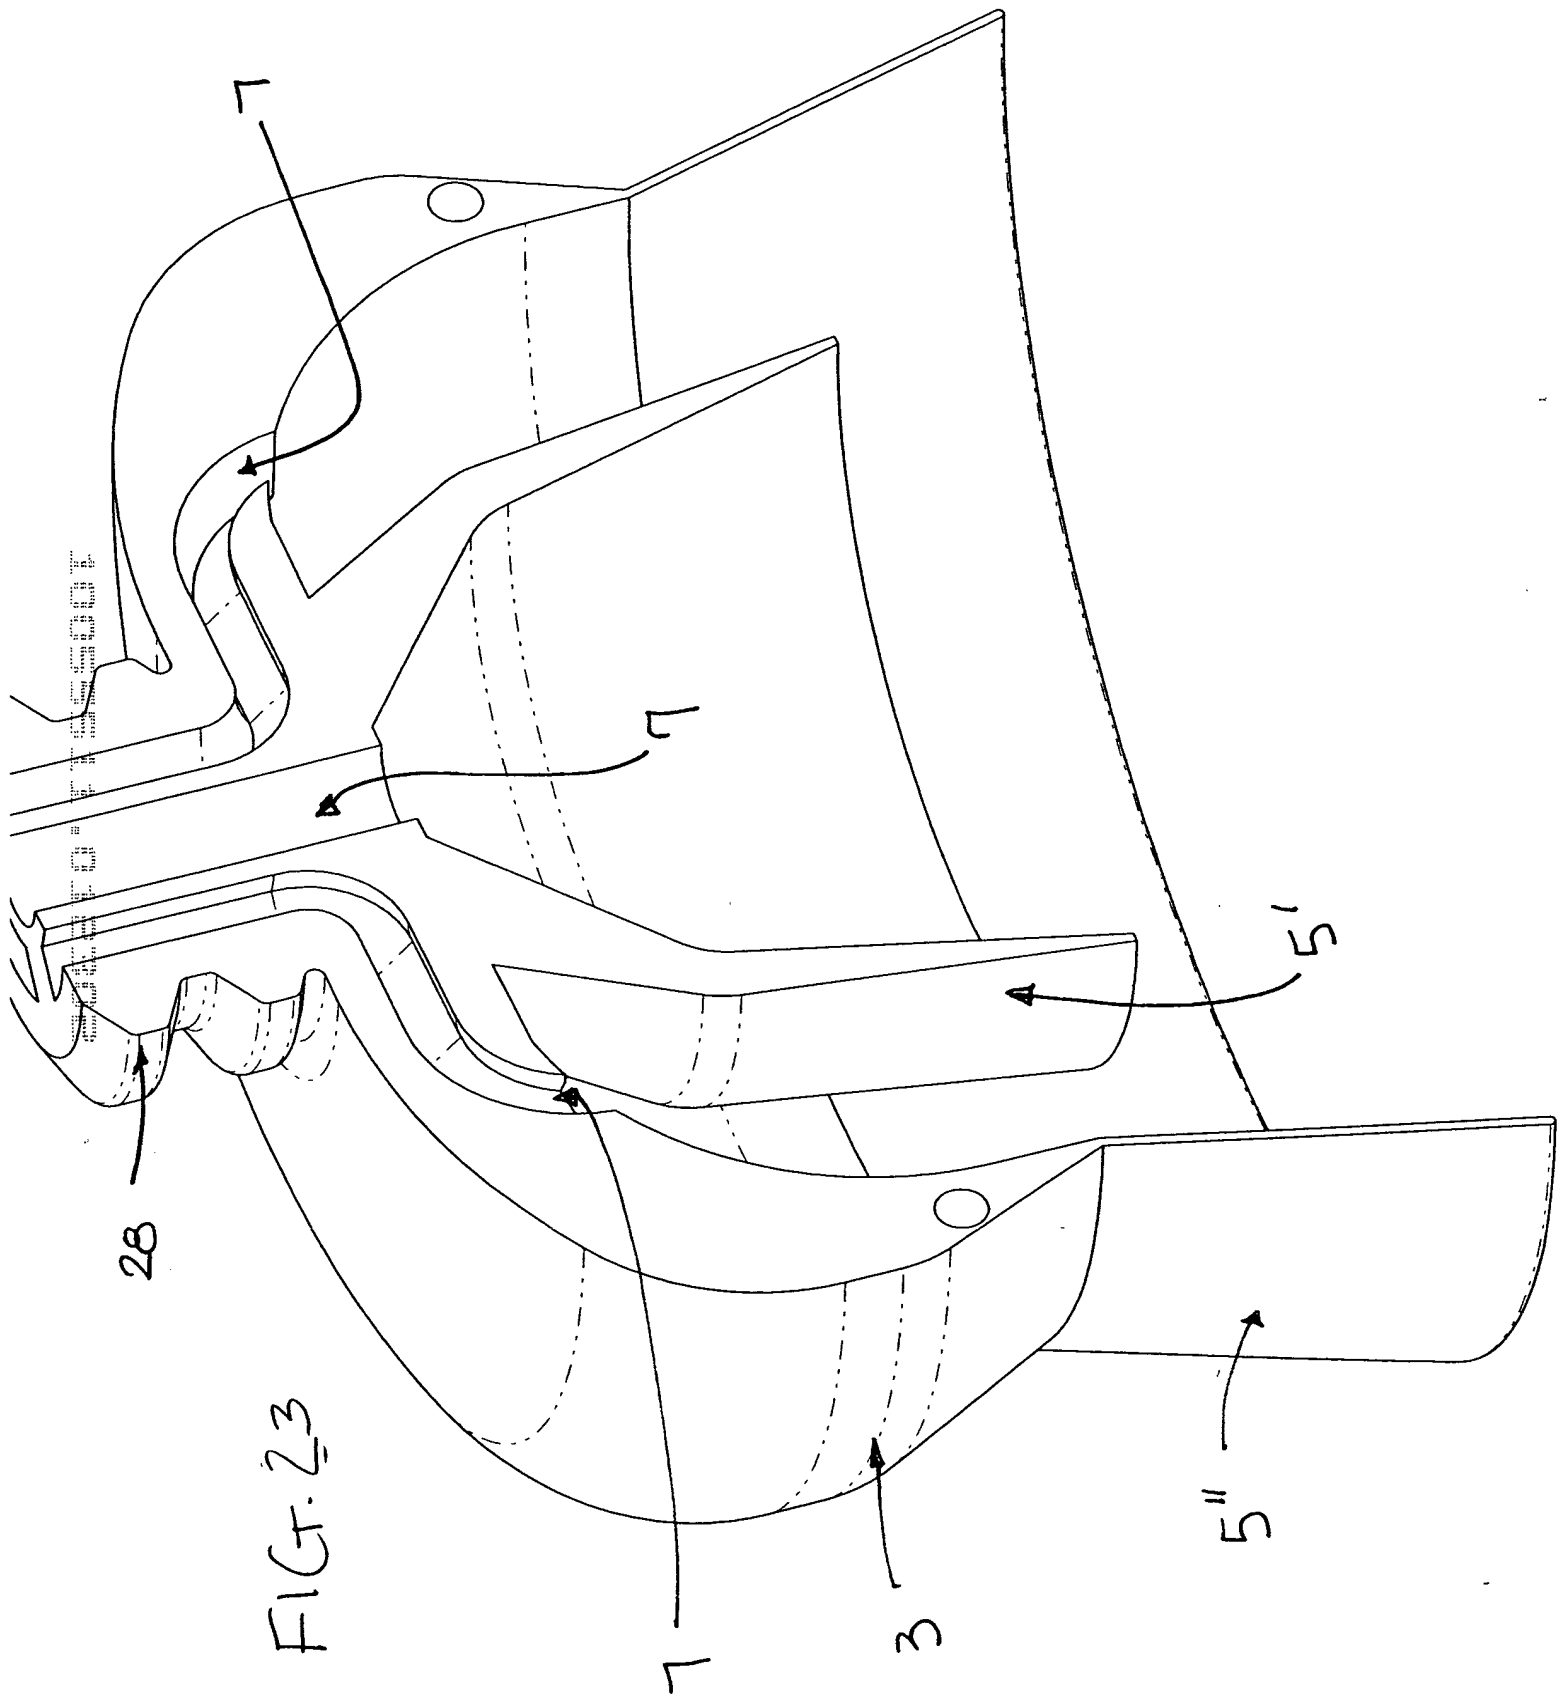


FIG. 22





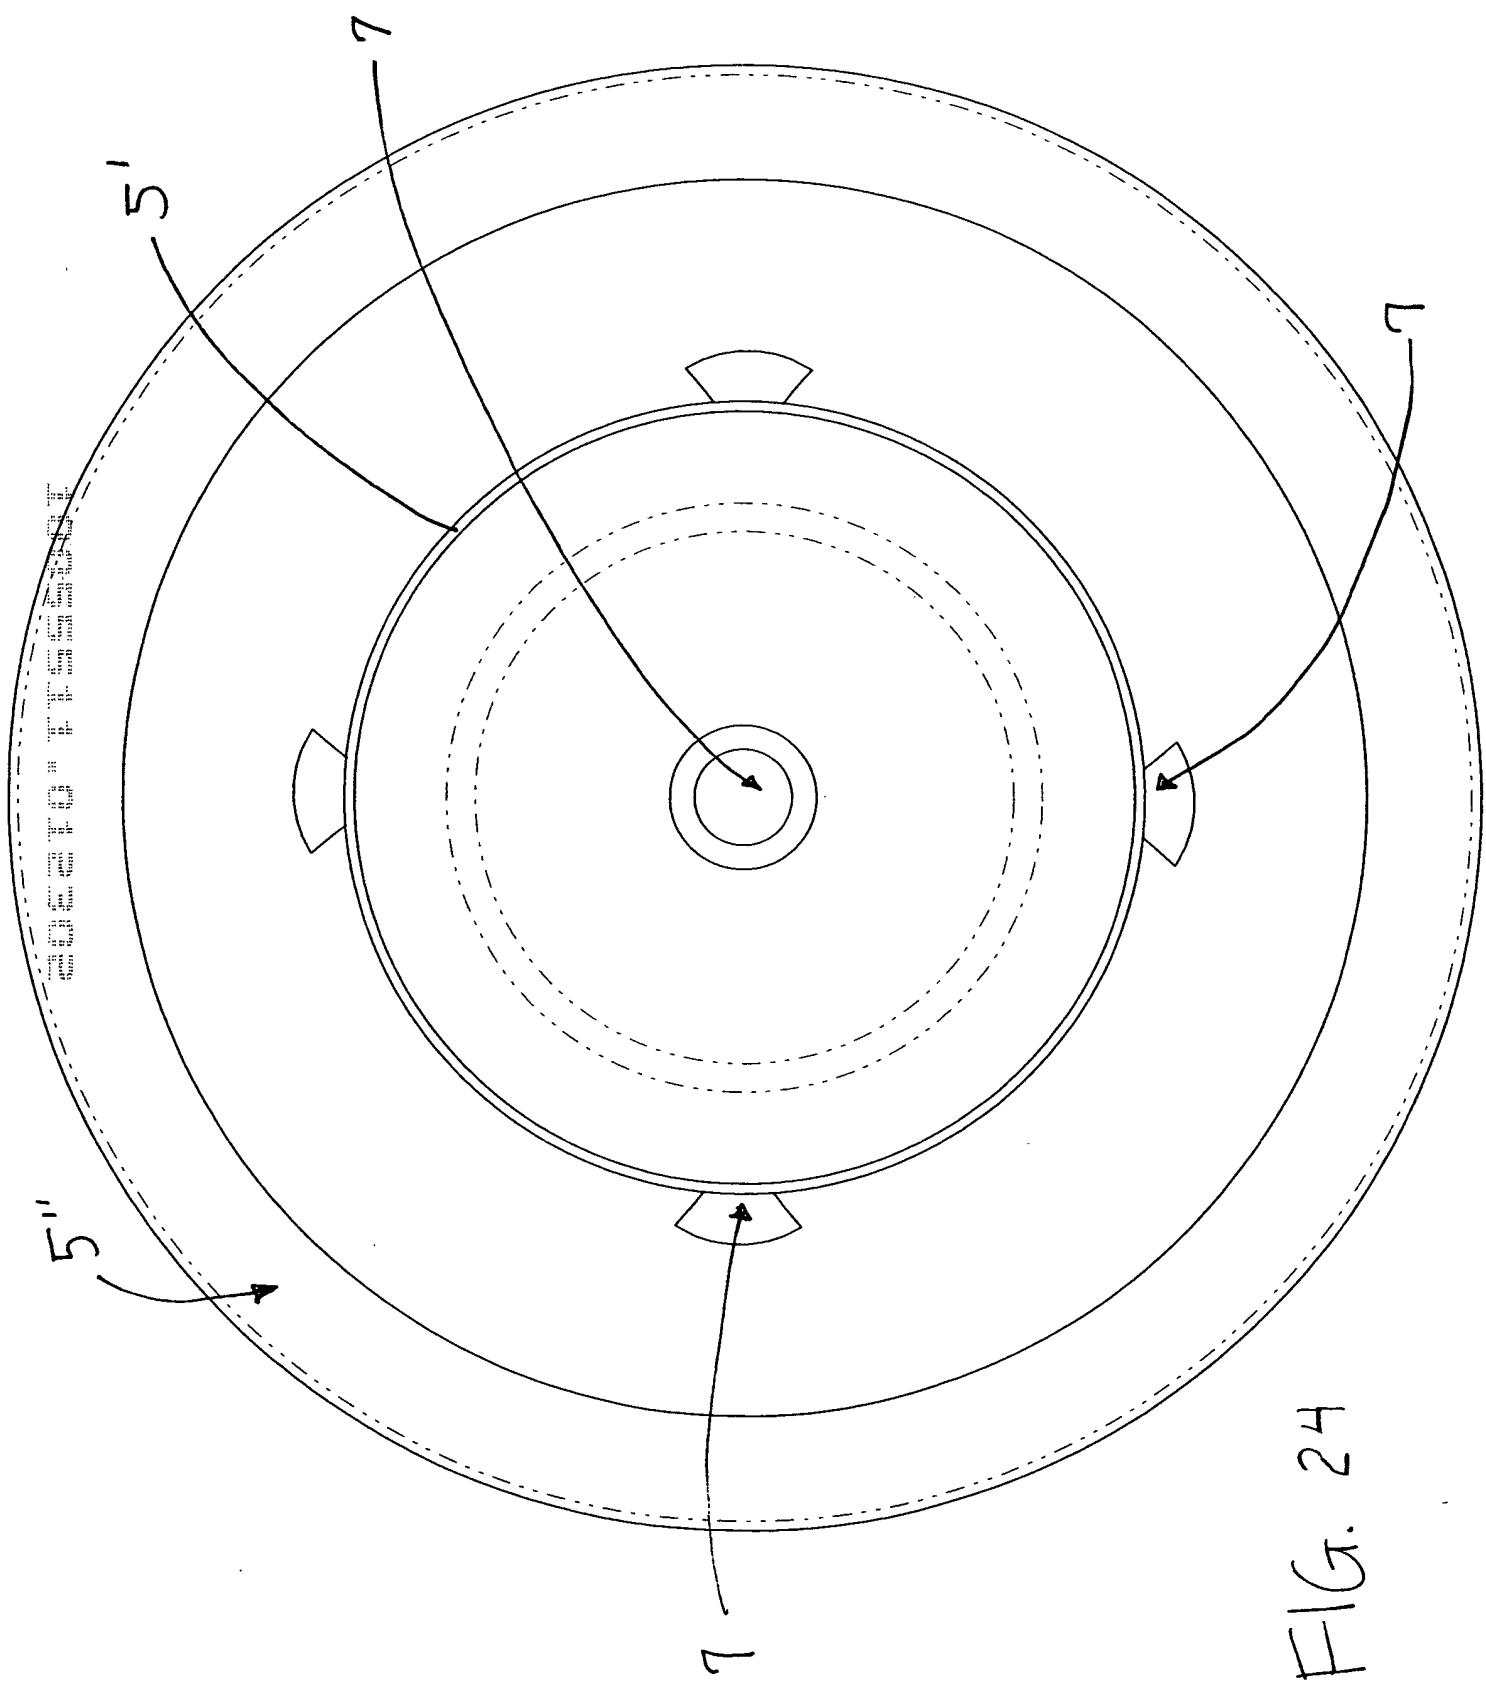


FIG. 24

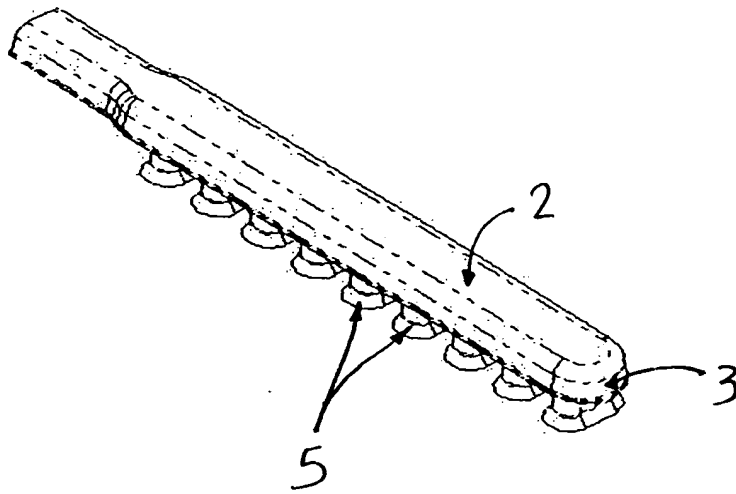


FIG. 25

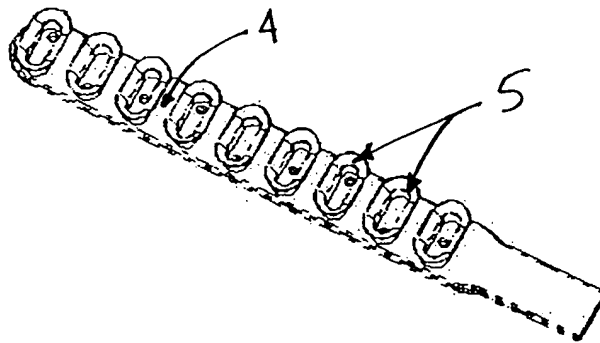


FIG. 26

7

5

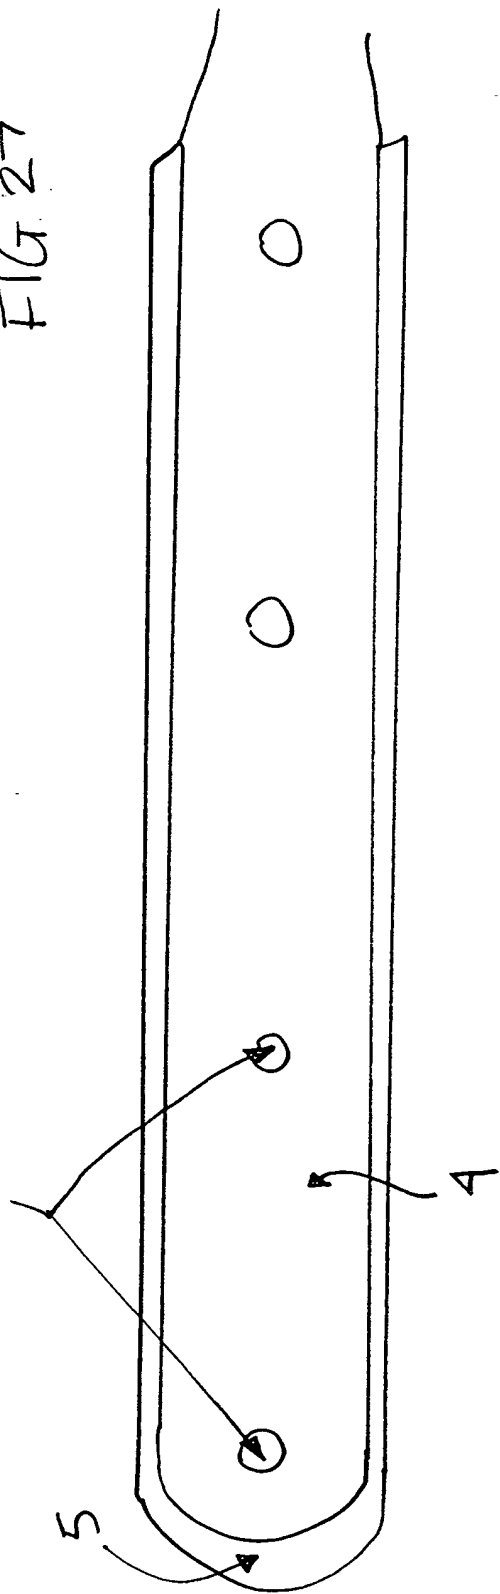


FIG. 27

2

3

5



FIG. 28

FIG. 29 is a perspective view of the device of FIG. 28, showing the device in a closed position. The device is a long, narrow, rectangular strip with rounded ends. It has a series of seven U-shaped openings along its length. Each U-shaped opening has a small circular hole in its center. The device is shown in a perspective view, with the top and bottom surfaces visible. The top surface is slightly curved upwards. The bottom surface is slightly curved downwards. The device is shown in a closed position, with the U-shaped openings facing each other.

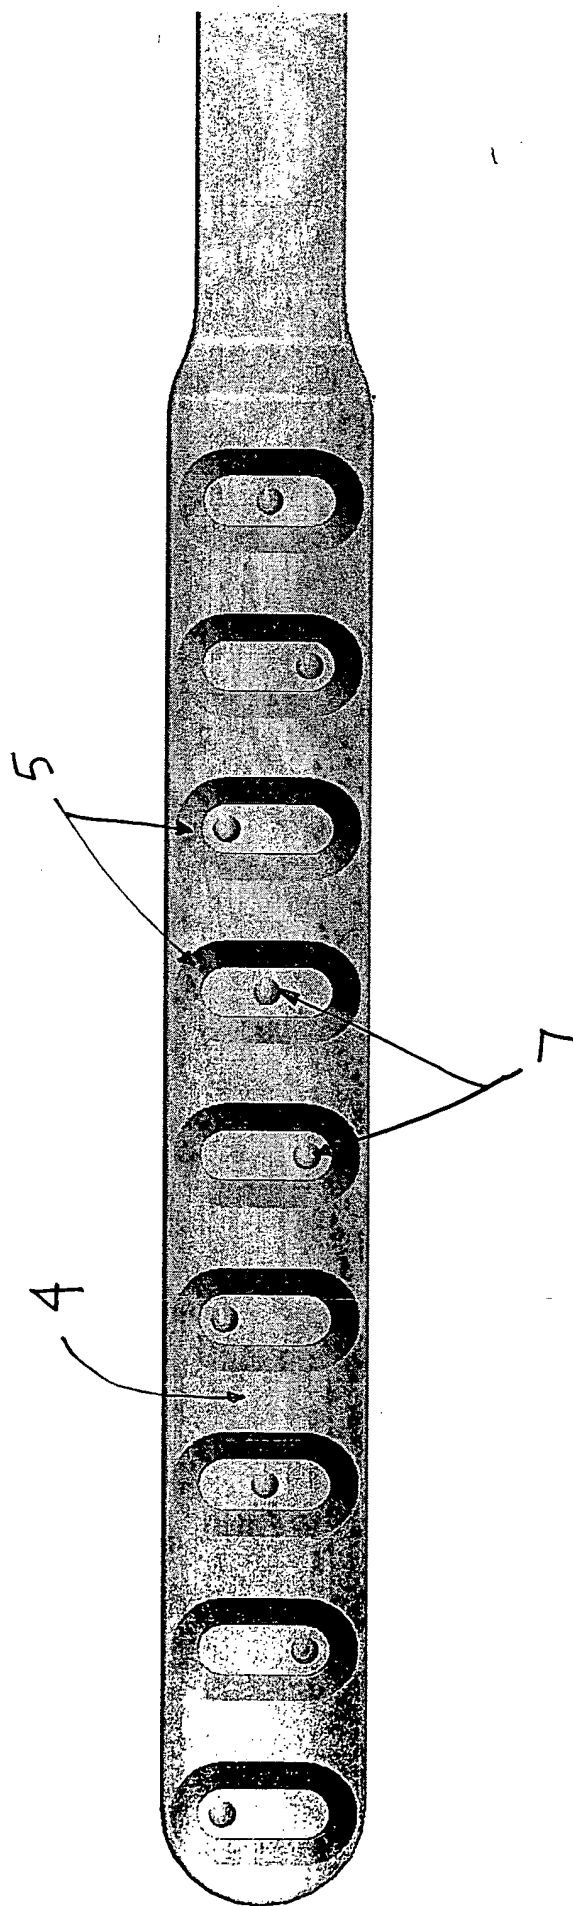


FIG. 29

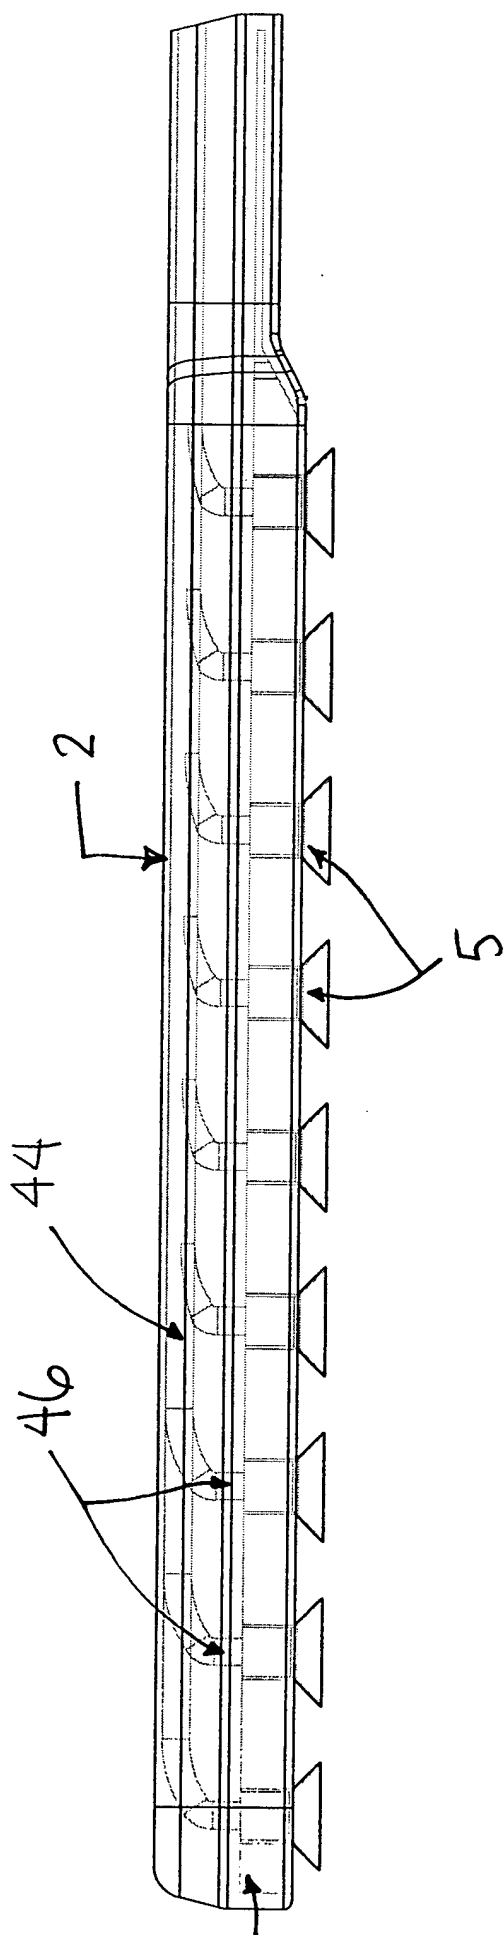


FIG. 30

FIG. 31 is a perspective view of the device 500, showing the top surface 502, the side surface 504, and the bottom surface 506. The device 500 is a rectangular block with a series of rectangular protrusions 508 on the top surface 502. The protrusions 508 are arranged in a row along the length of the device 500. The side surface 504 is smooth, and the bottom surface 506 is also smooth. The device 500 is shown in a perspective view, with the top surface 502, the side surface 504, and the bottom surface 506 visible.

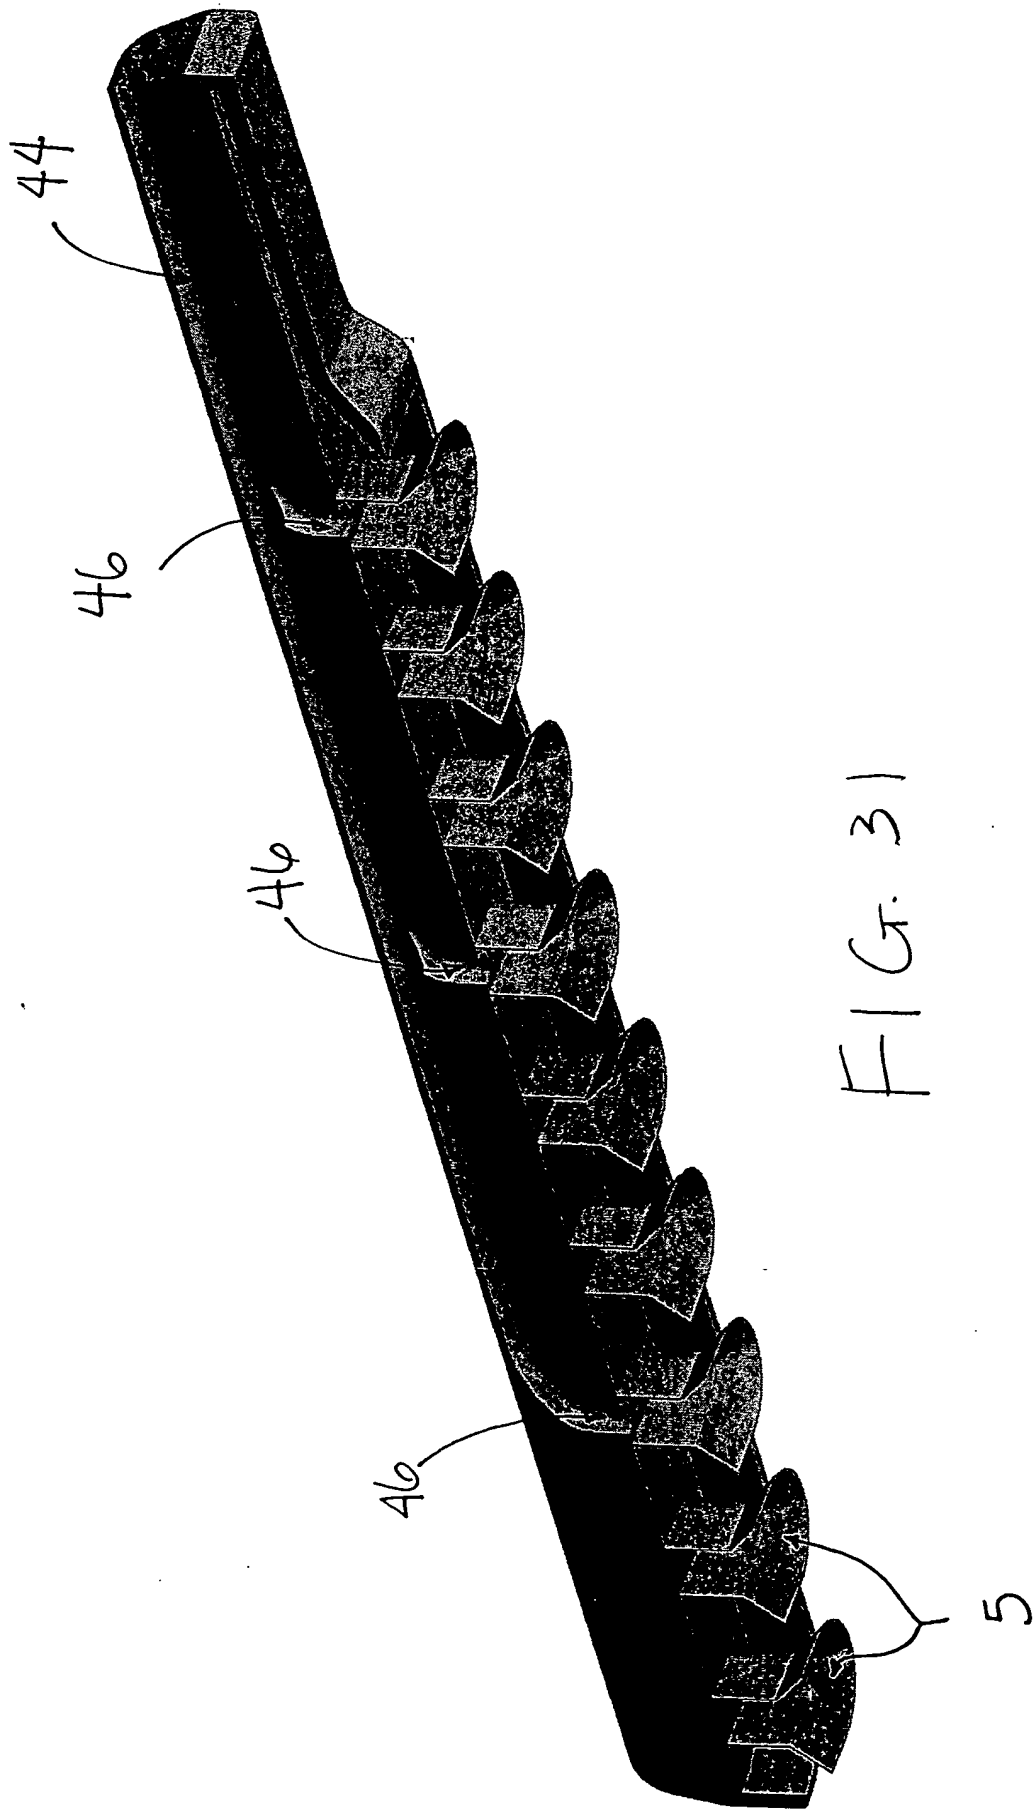


FIG. 31


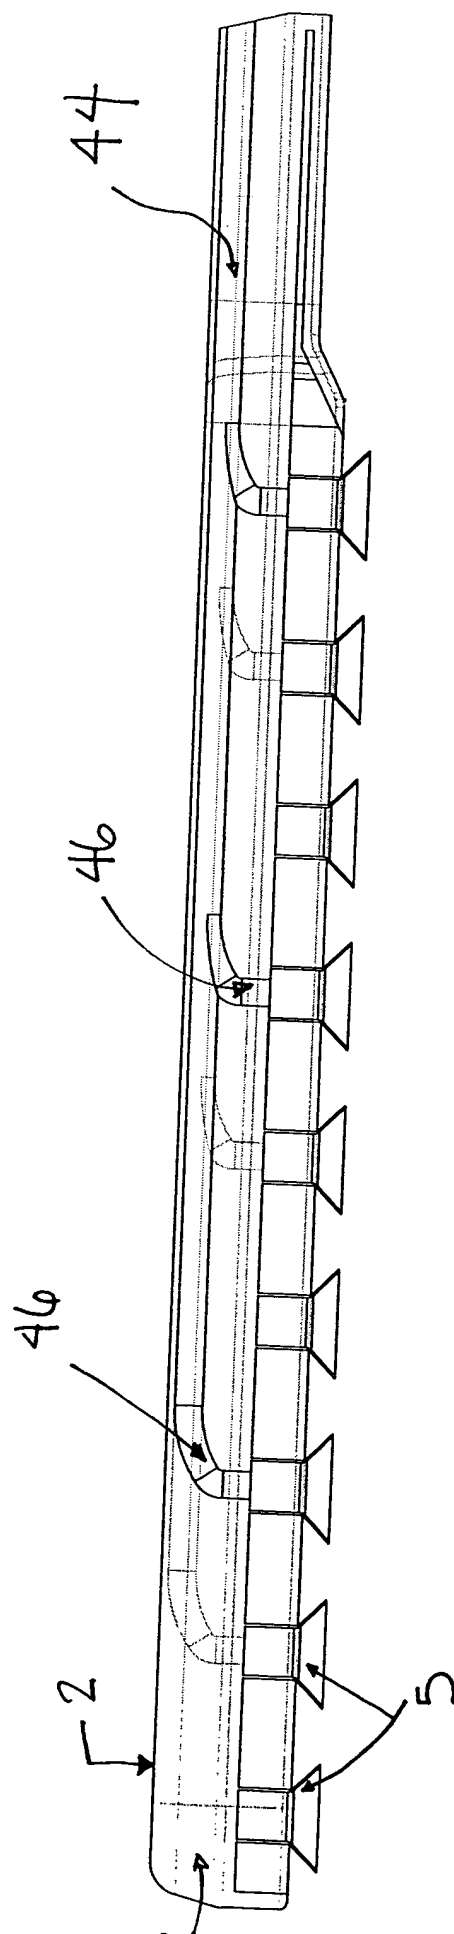



FIG. 32



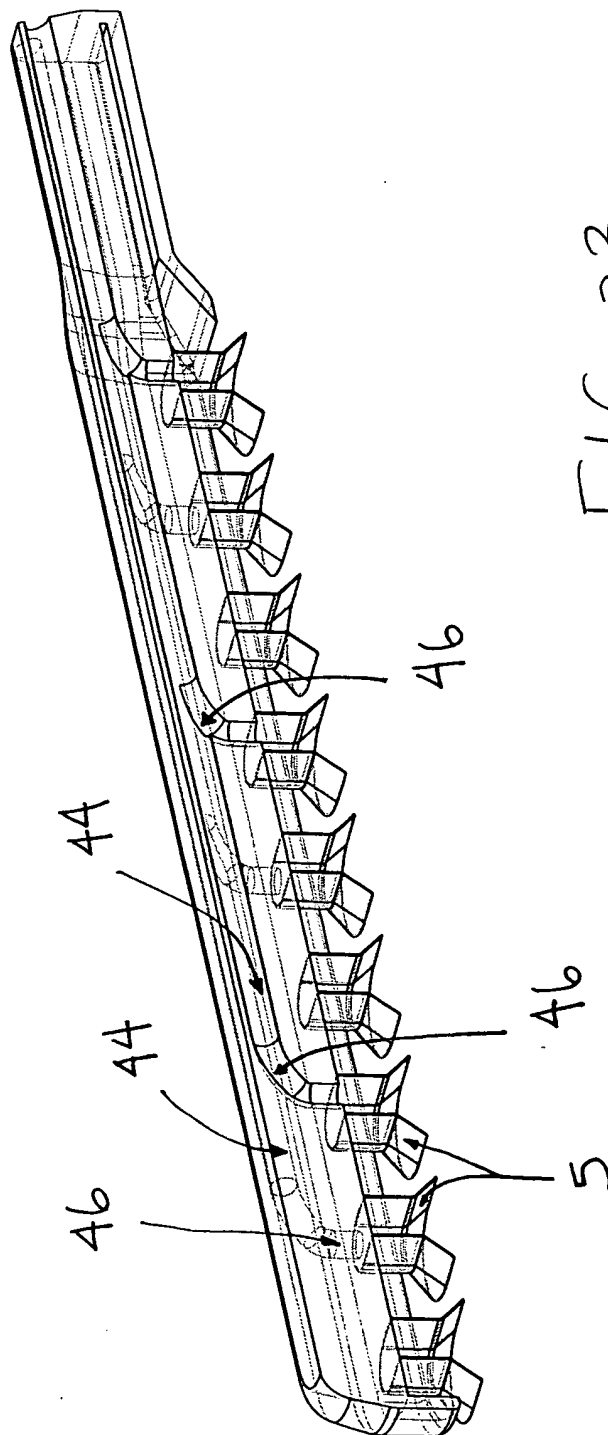

F1G.33

FIG. 34

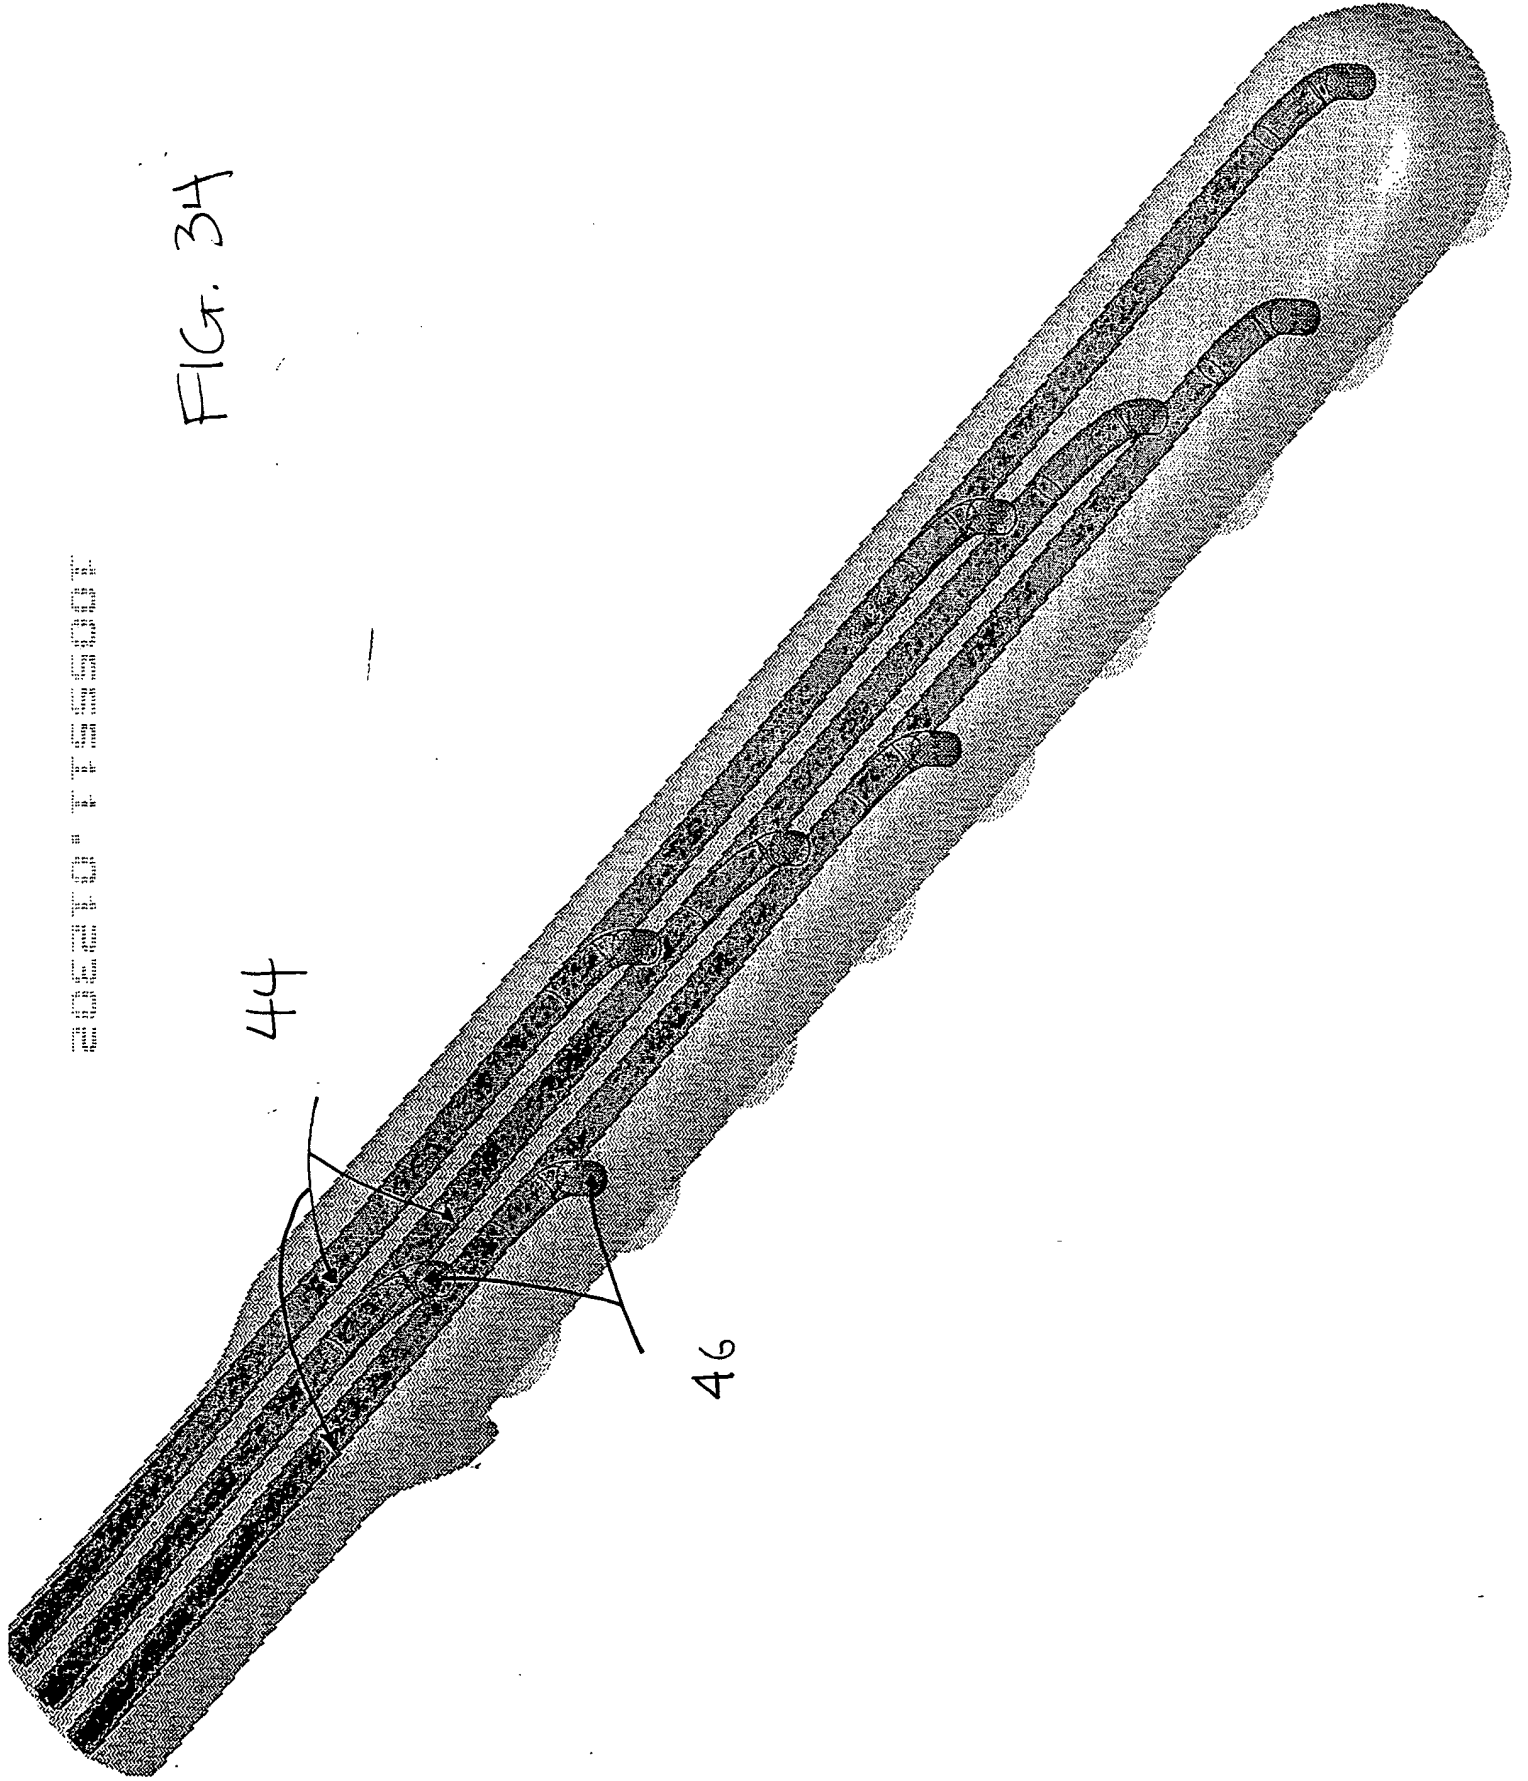

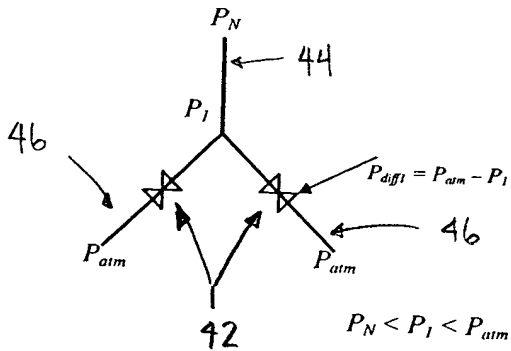


FIG. 35

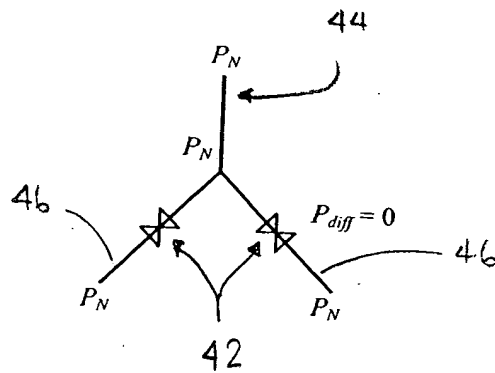


FIG. 36

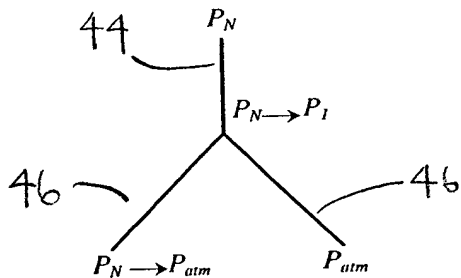


FIG. 37a

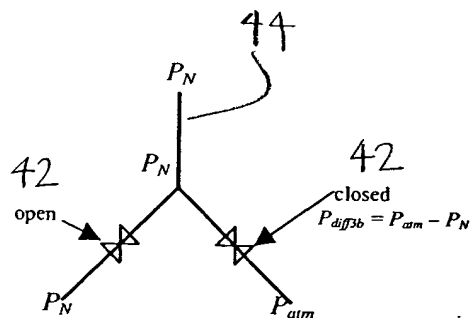


FIG. 37b

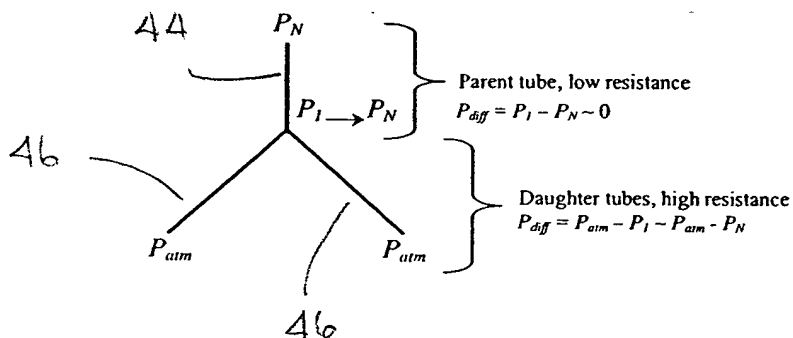


FIG. 38

FIG. 39

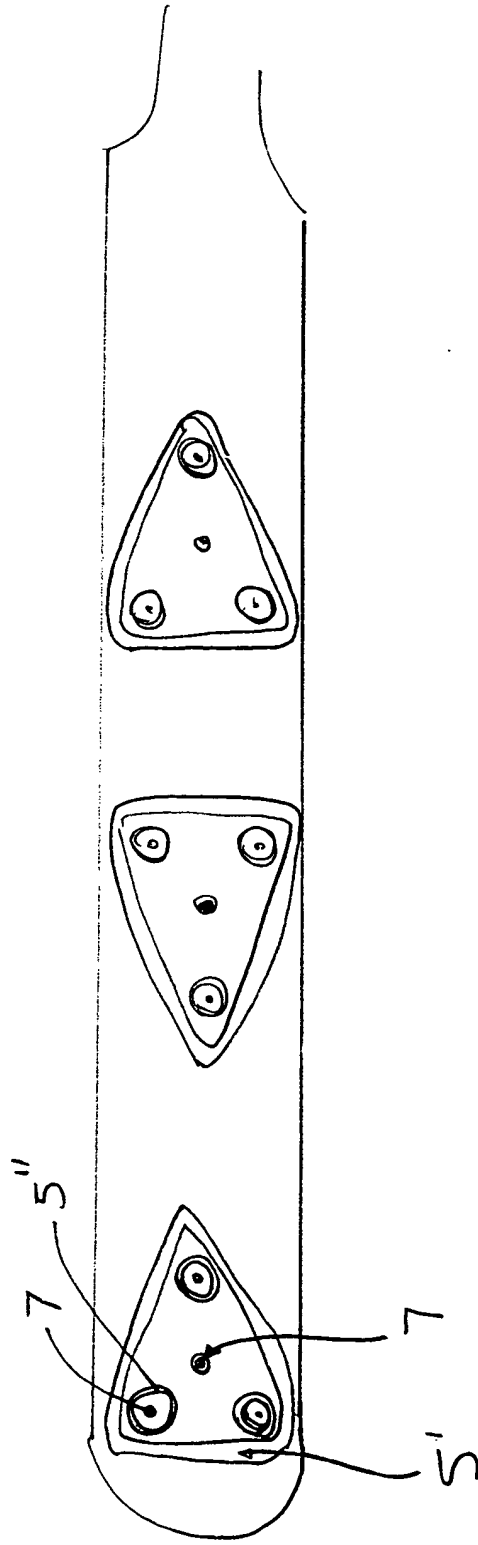


FIG. 39

FIG. 40 is a perspective view of the glove 10, showing the fingers 11 and the palm 12. The fingers 11 are shown with the fingers 11a, 11b, 11c, 11d, and 11e. The palm 12 is shown with the palm 12a, 12b, 12c, 12d, and 12e. The fingers 11 are shown with the fingers 11a, 11b, 11c, 11d, and 11e. The palm 12 is shown with the palm 12a, 12b, 12c, 12d, and 12e.

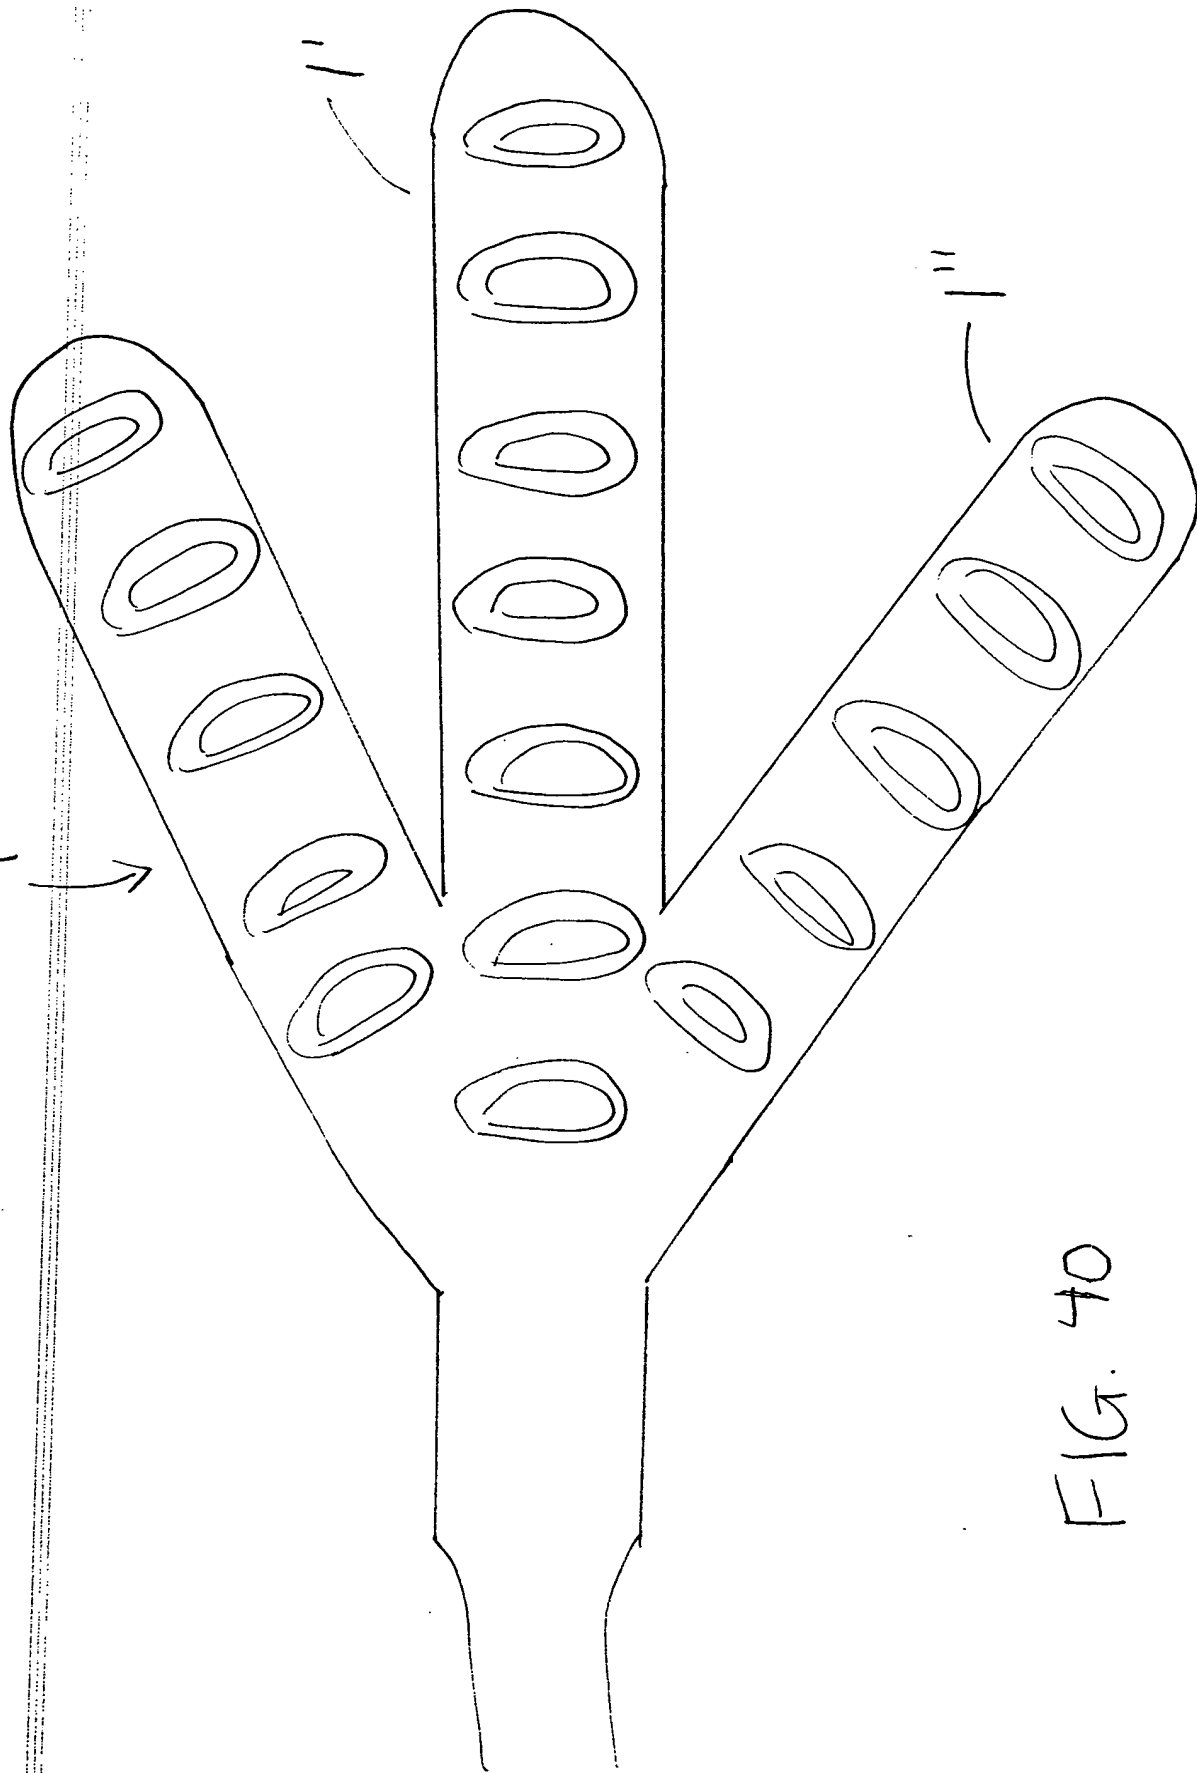
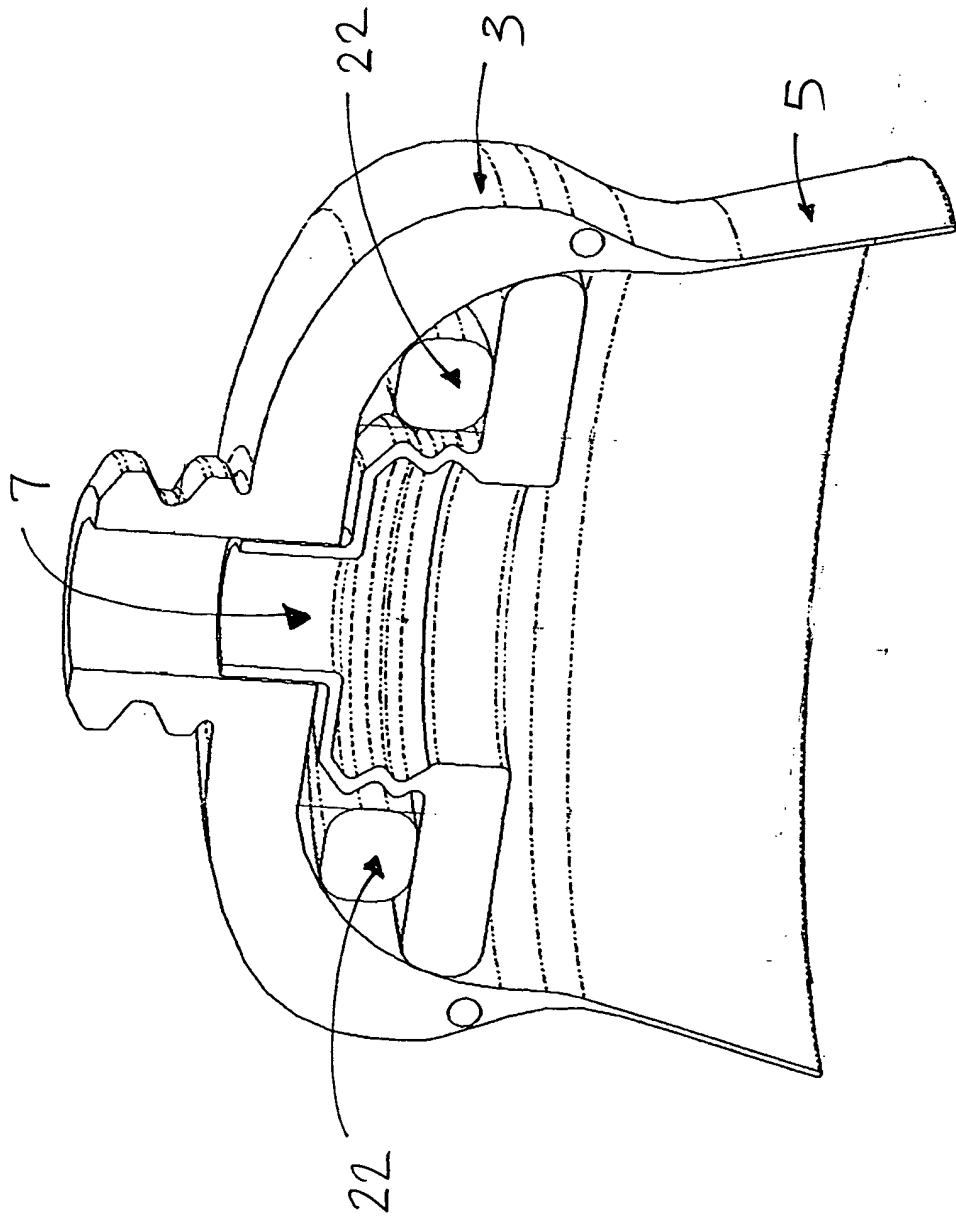


FIG. 40

FIG. 41



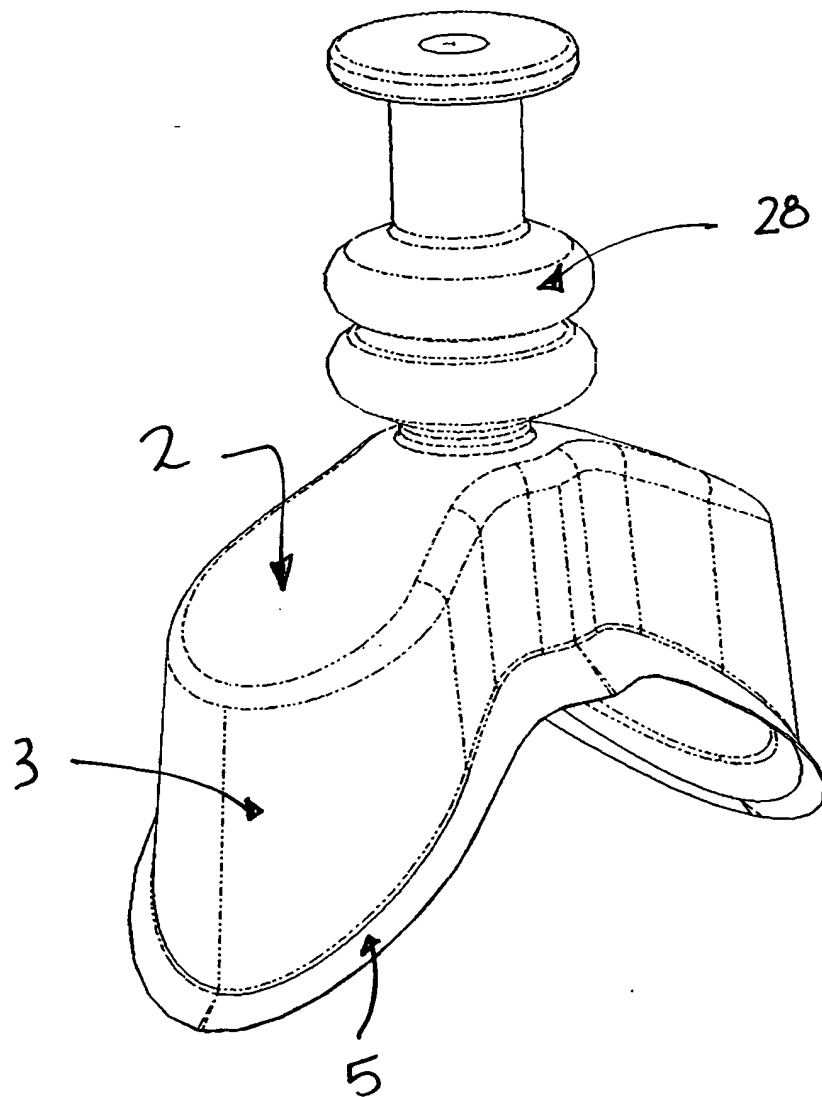


FIG. 42

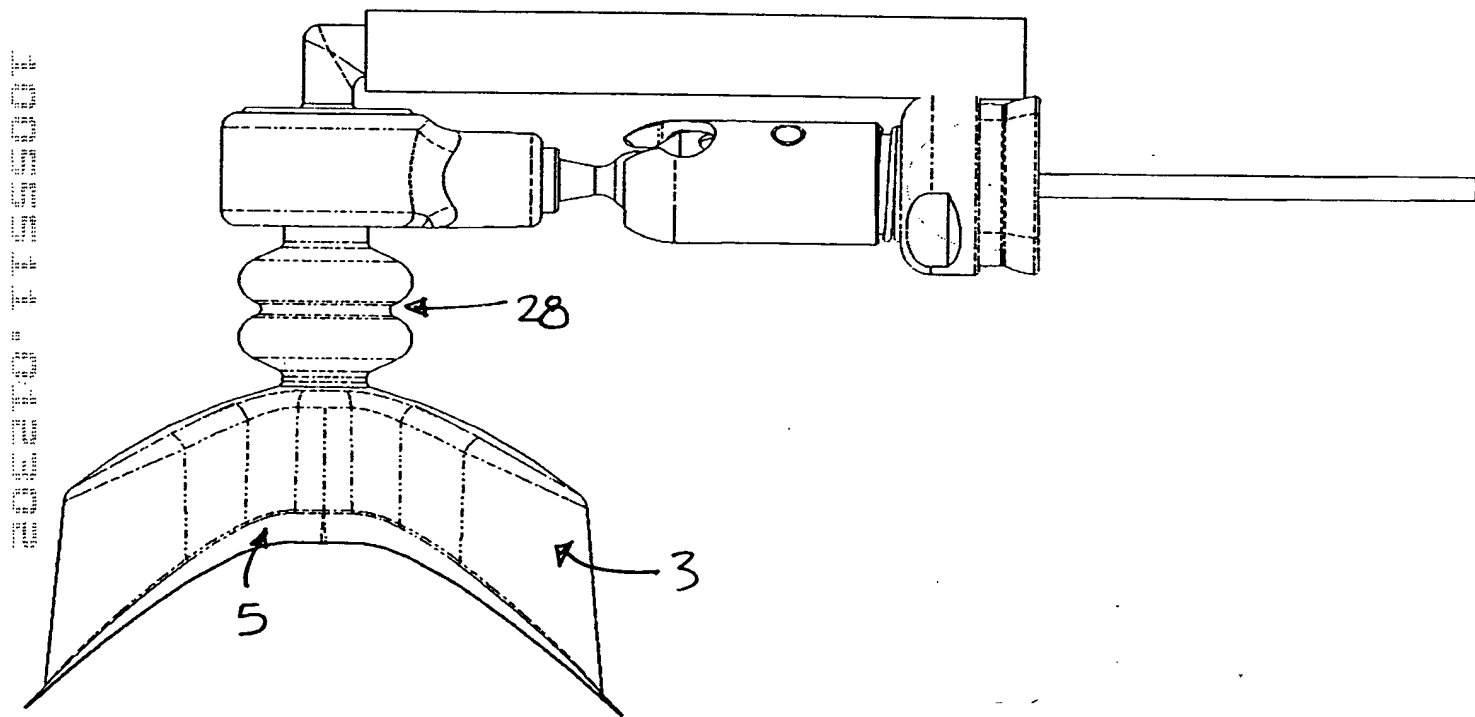


FIG. 43



FIG. 44 is a perspective view of the device 100 in a closed position, showing the handle 20 and the blade 10. The handle 20 is in a retracted position, and the blade 10 is folded against the handle. The device 100 is shown in a perspective view, and the handle 20 is shown in a retracted position. The blade 10 is shown in a folded position against the handle 20. The device 100 is shown in a perspective view, and the handle 20 is shown in a retracted position. The blade 10 is shown in a folded position against the handle 20.

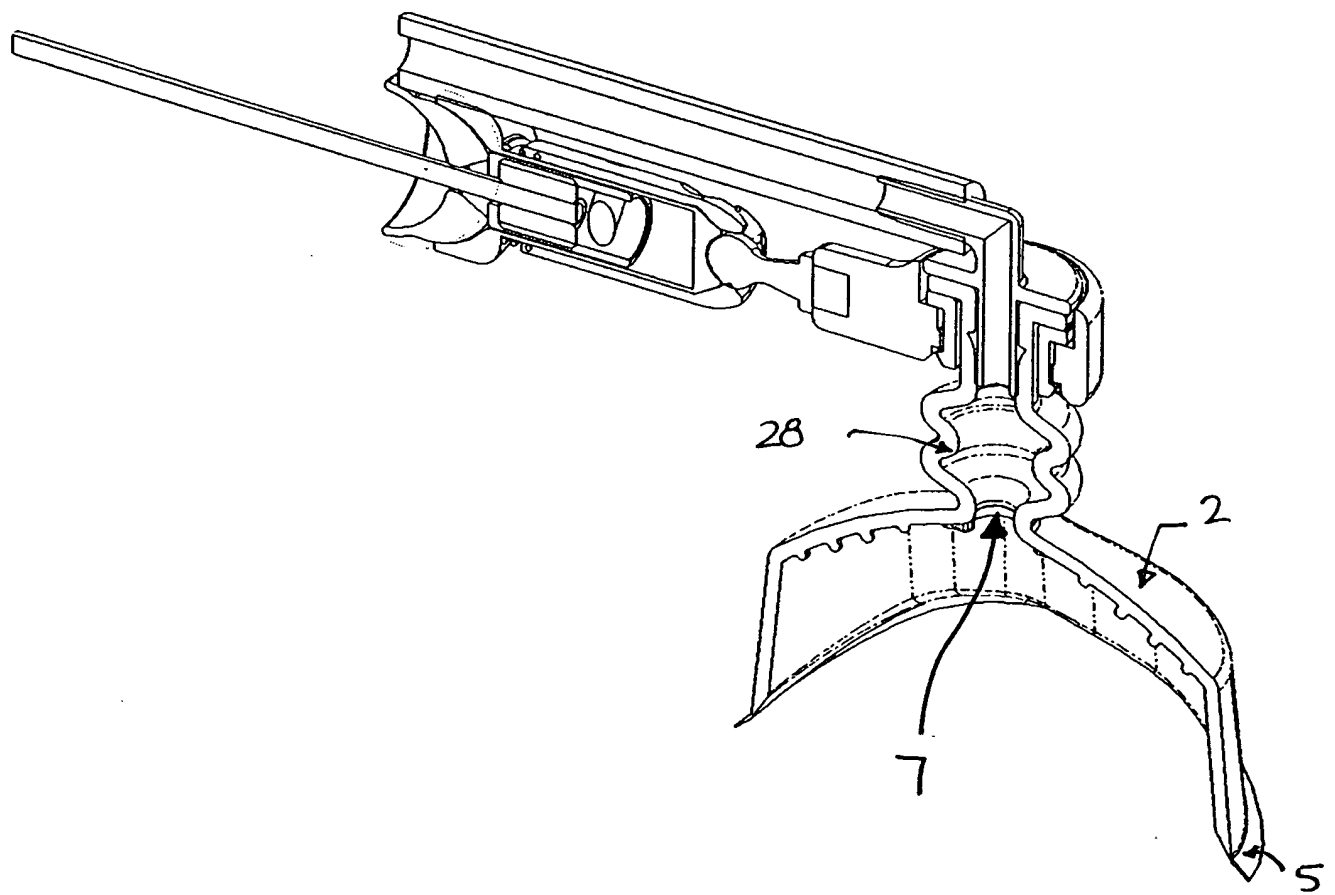


FIG 44

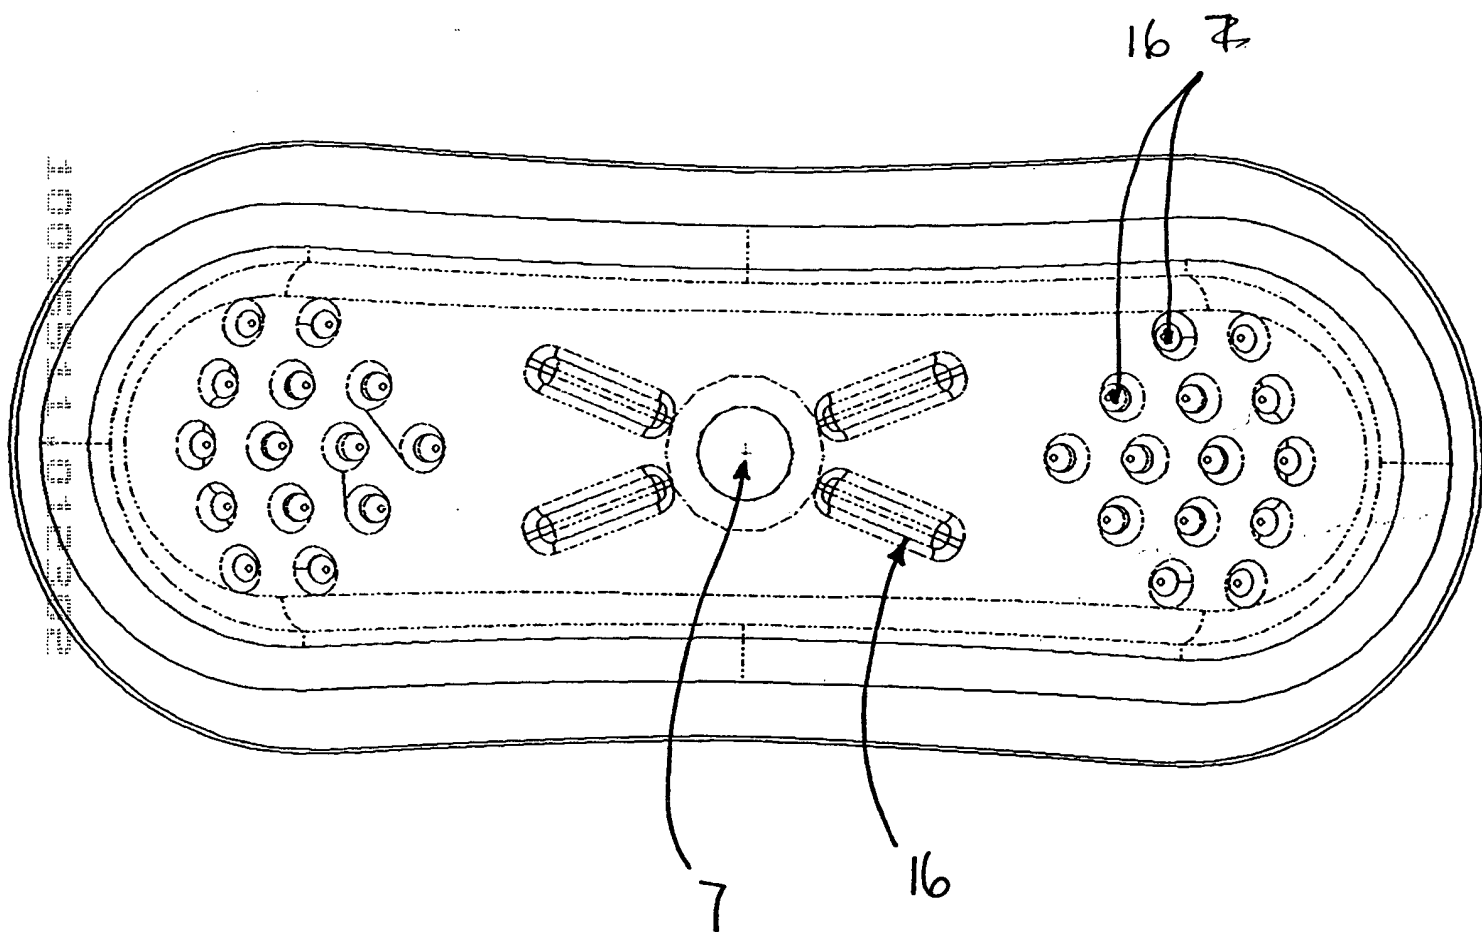


FIG. 45

FIG. 46

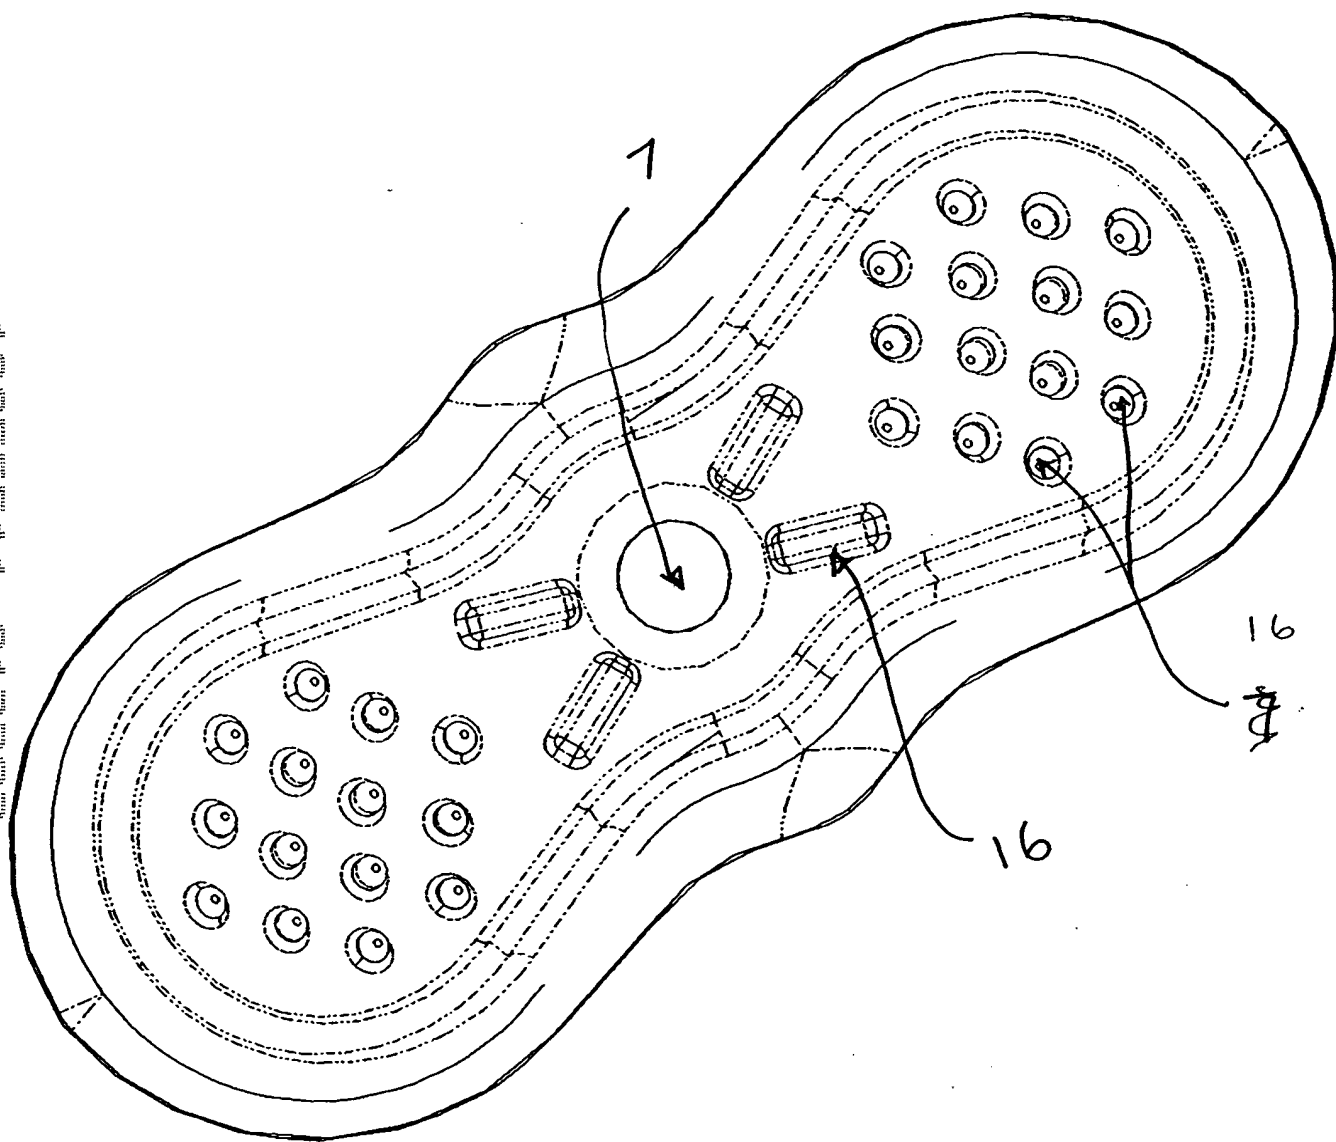


FIG. 46

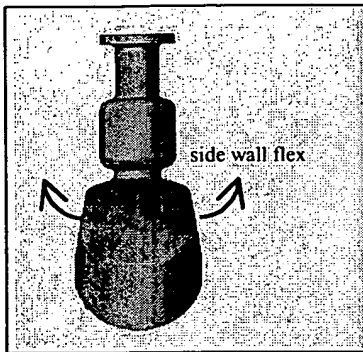


FIG. 47a

FIG. 47b

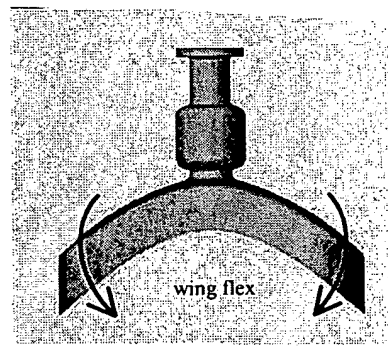


FIG. 47c

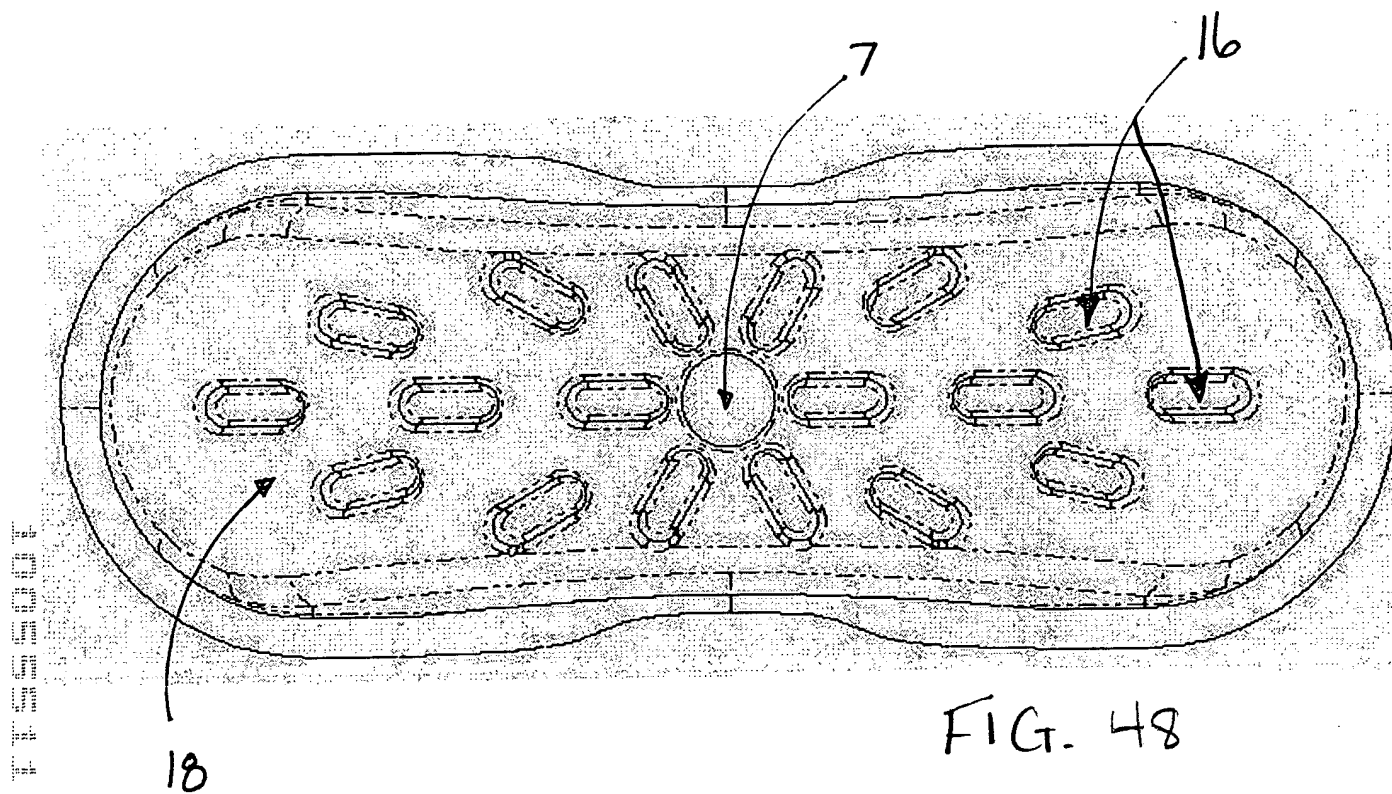


FIG. 48

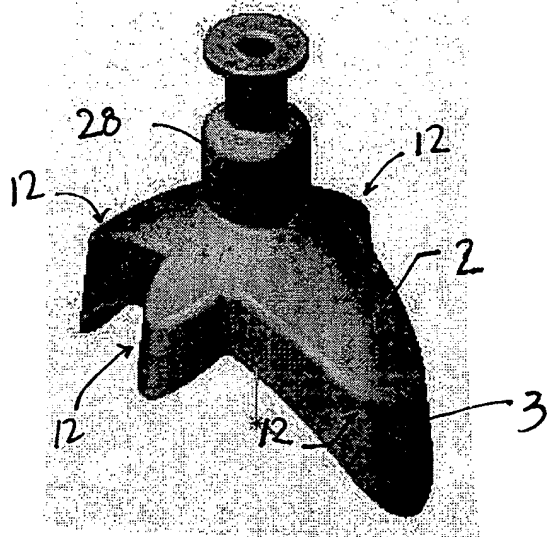


FIG. 49a

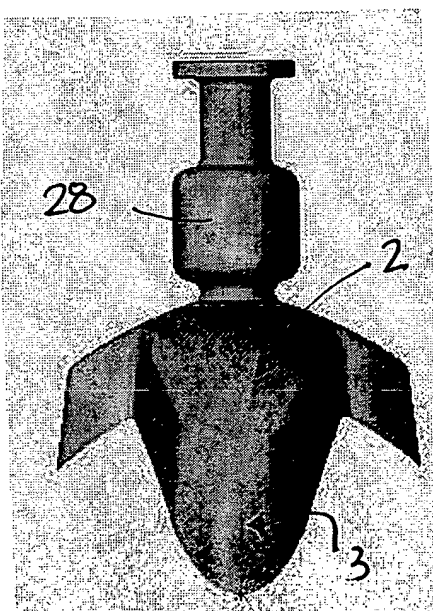
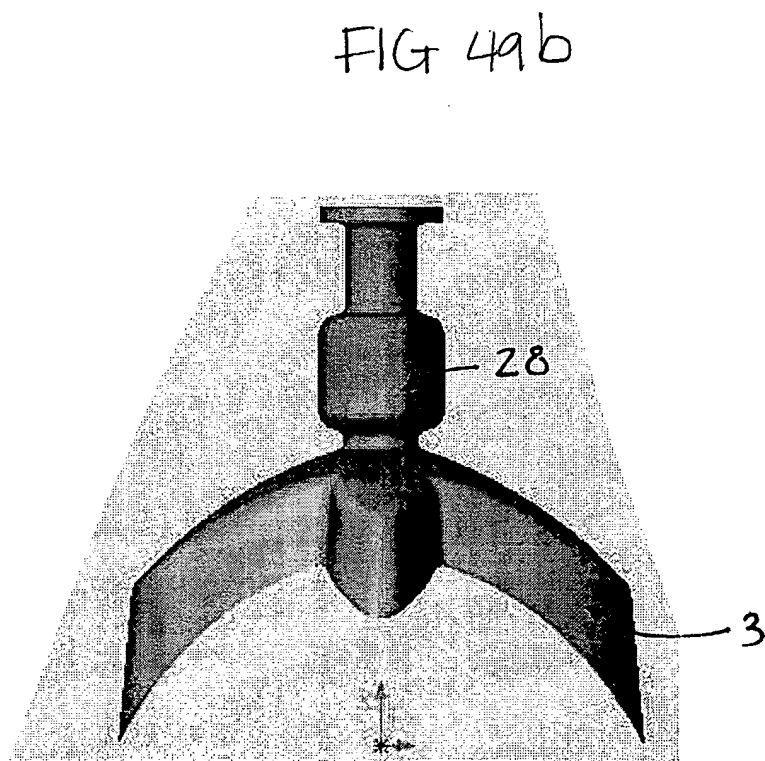


FIG. 49c

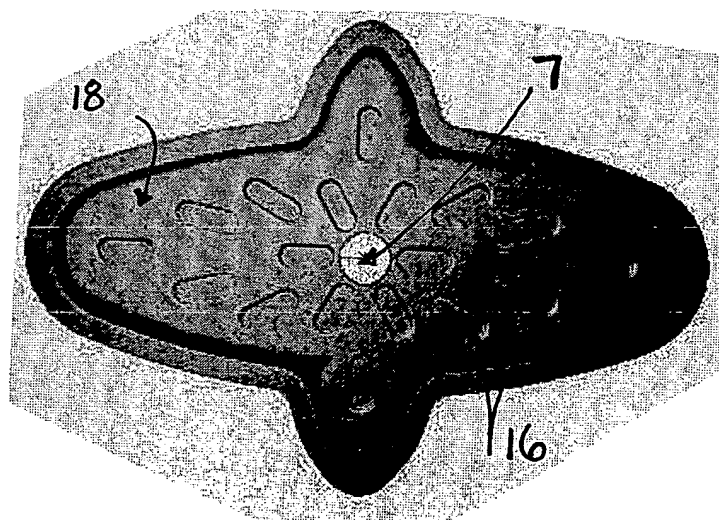


FIG. 49d

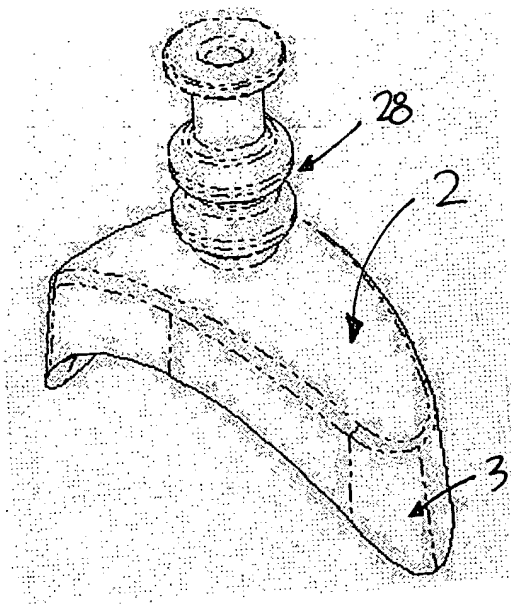


FIG. 50a

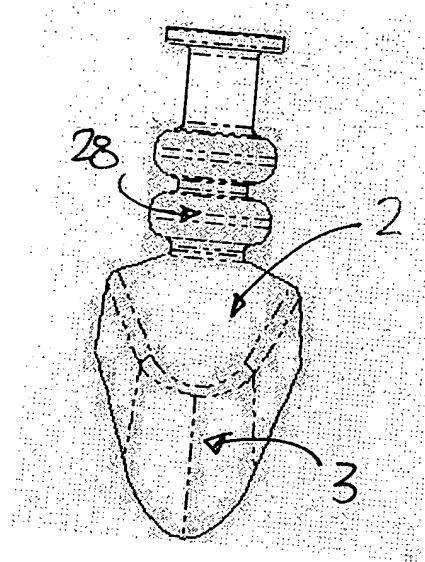


FIG. 50b

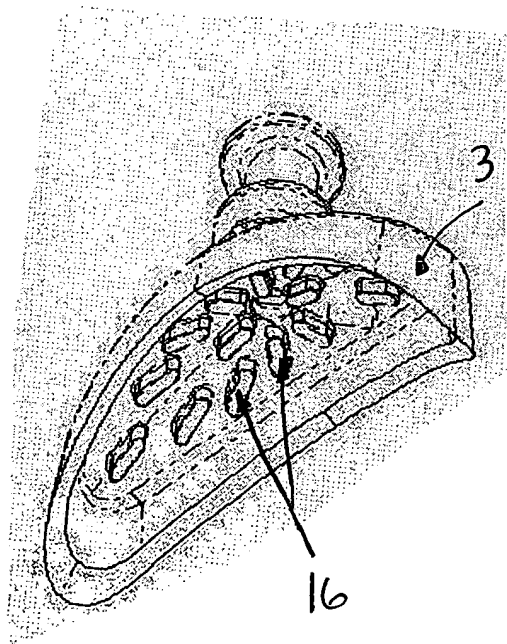


FIG. 50c

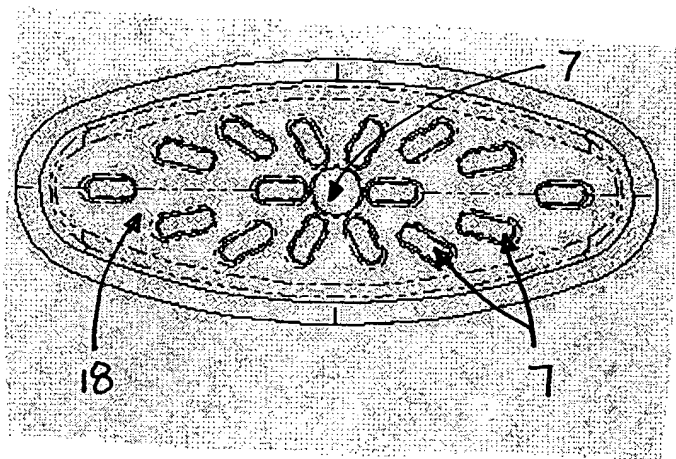


FIG. 50d

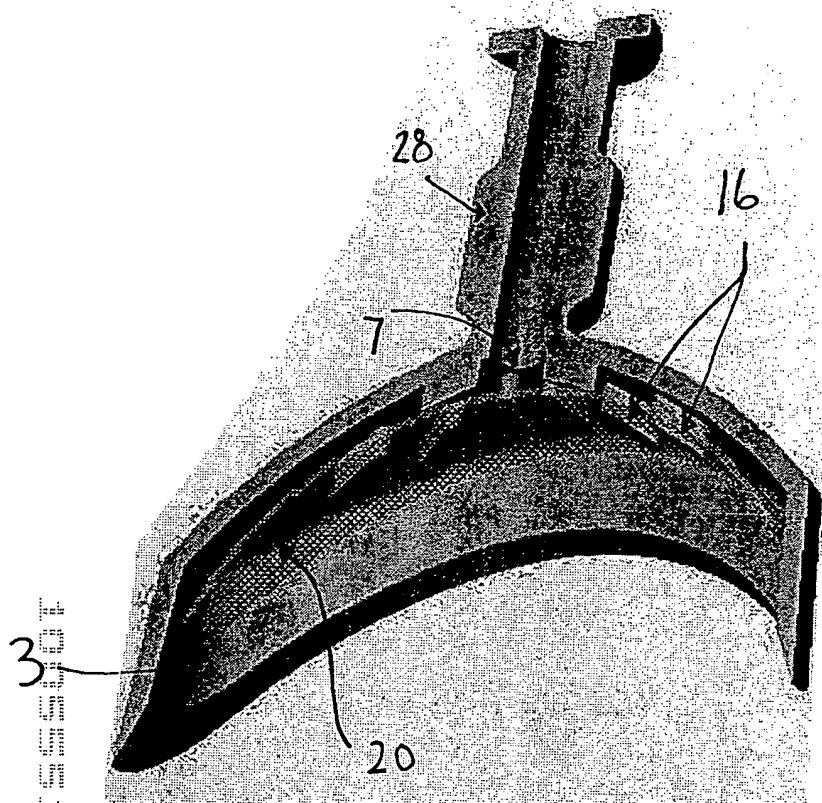
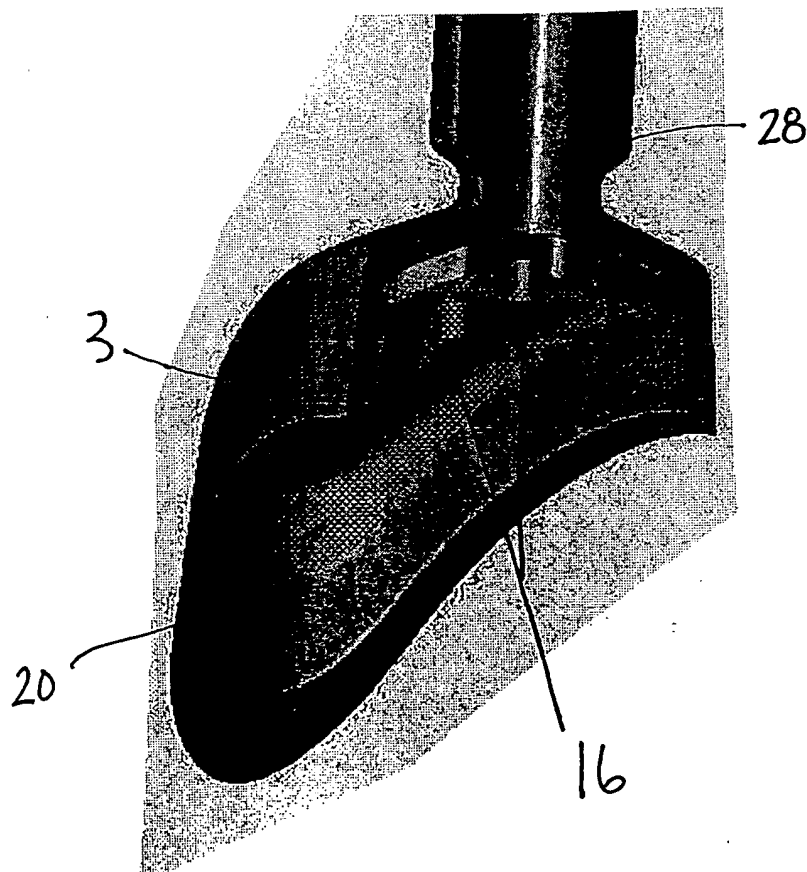


FIG. 51b





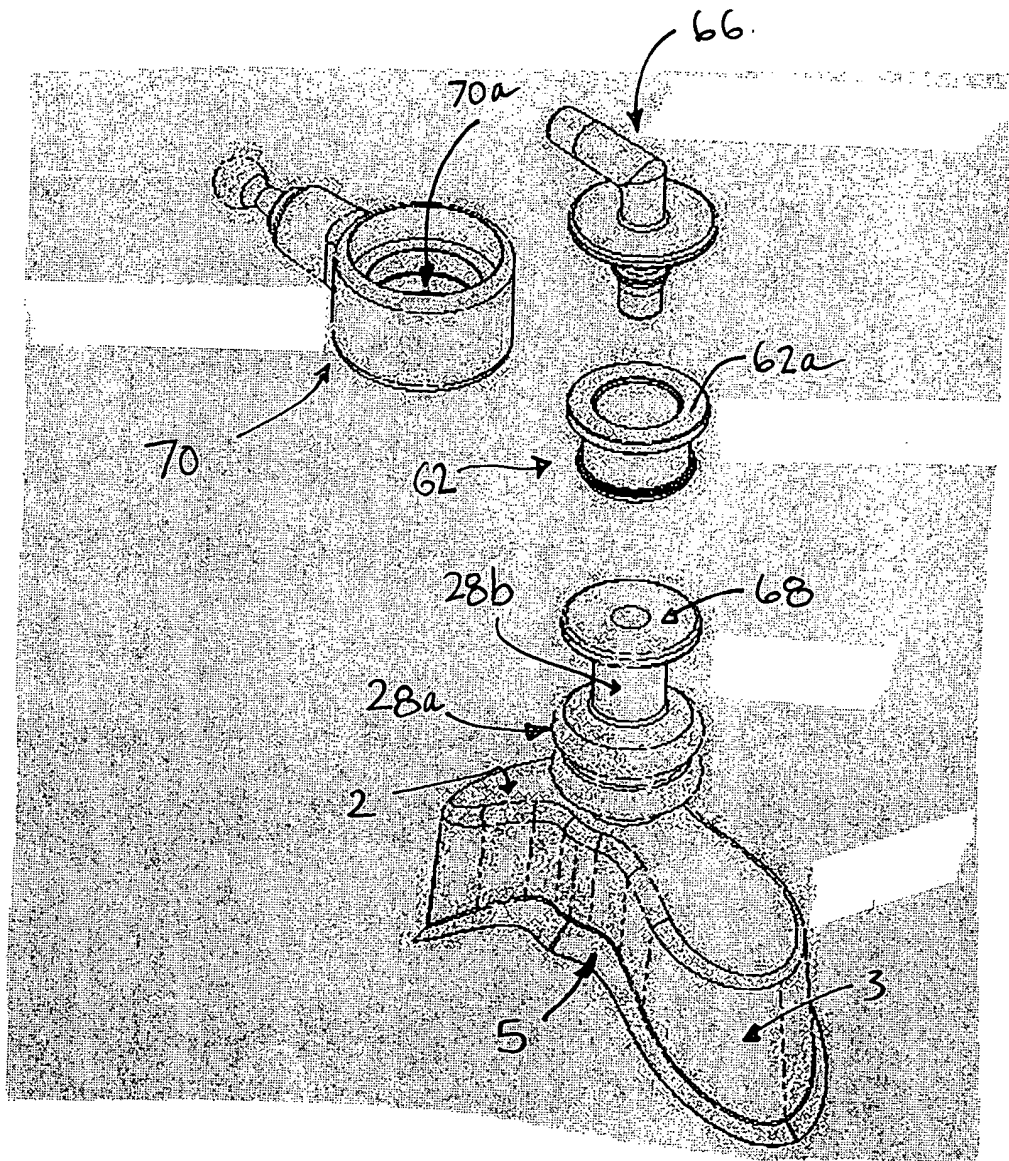


FIG. 52

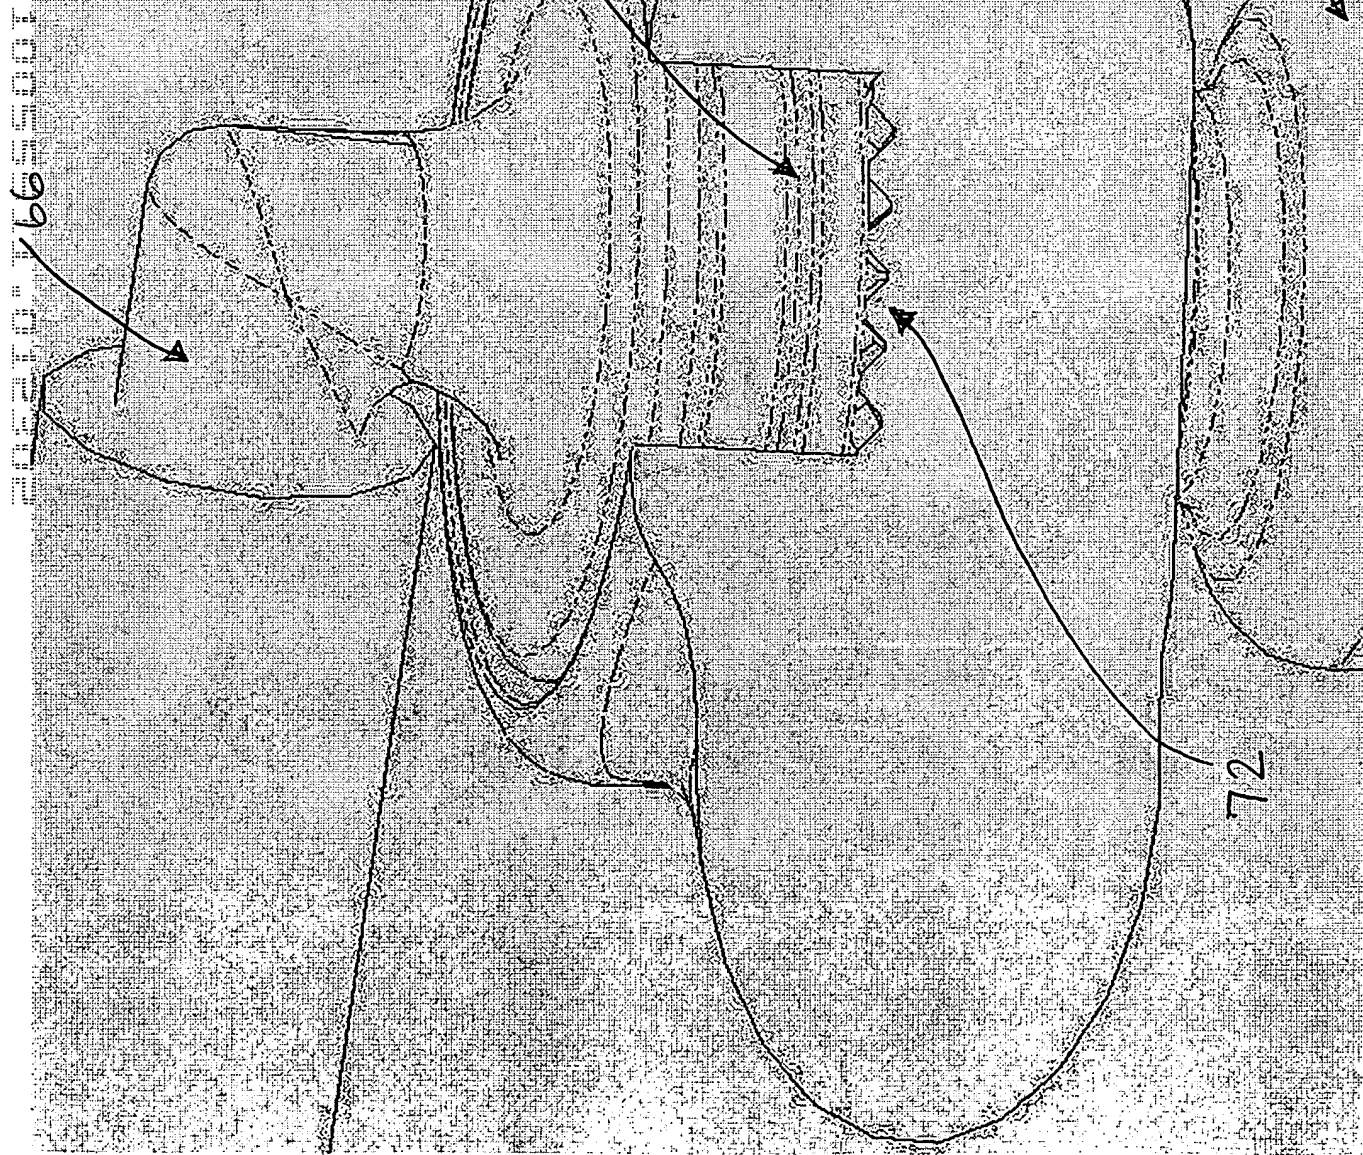


FIG. 53

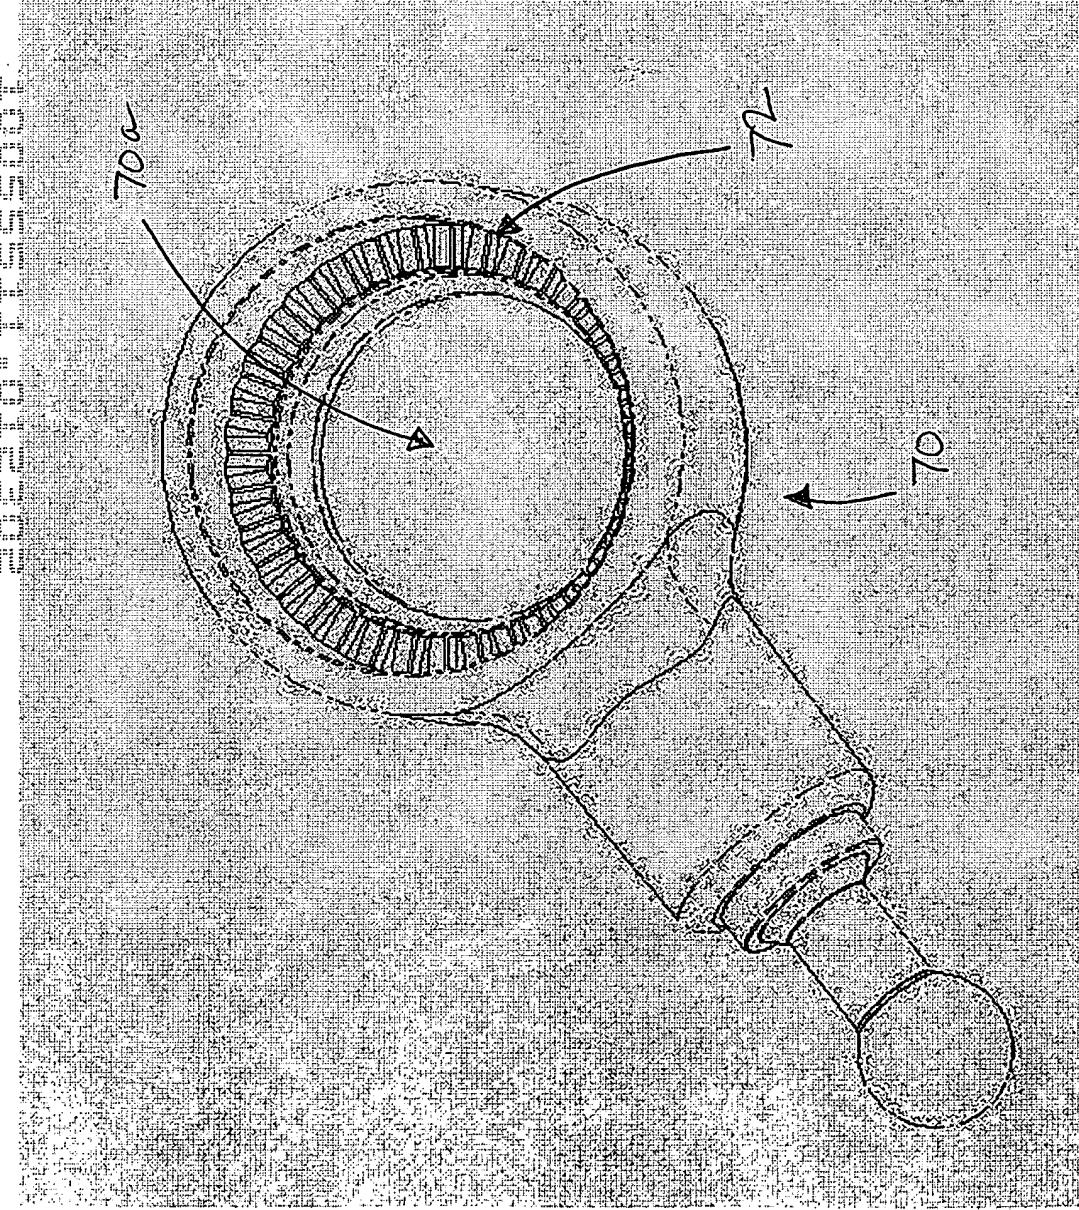


FIG. 54

FIG. 55

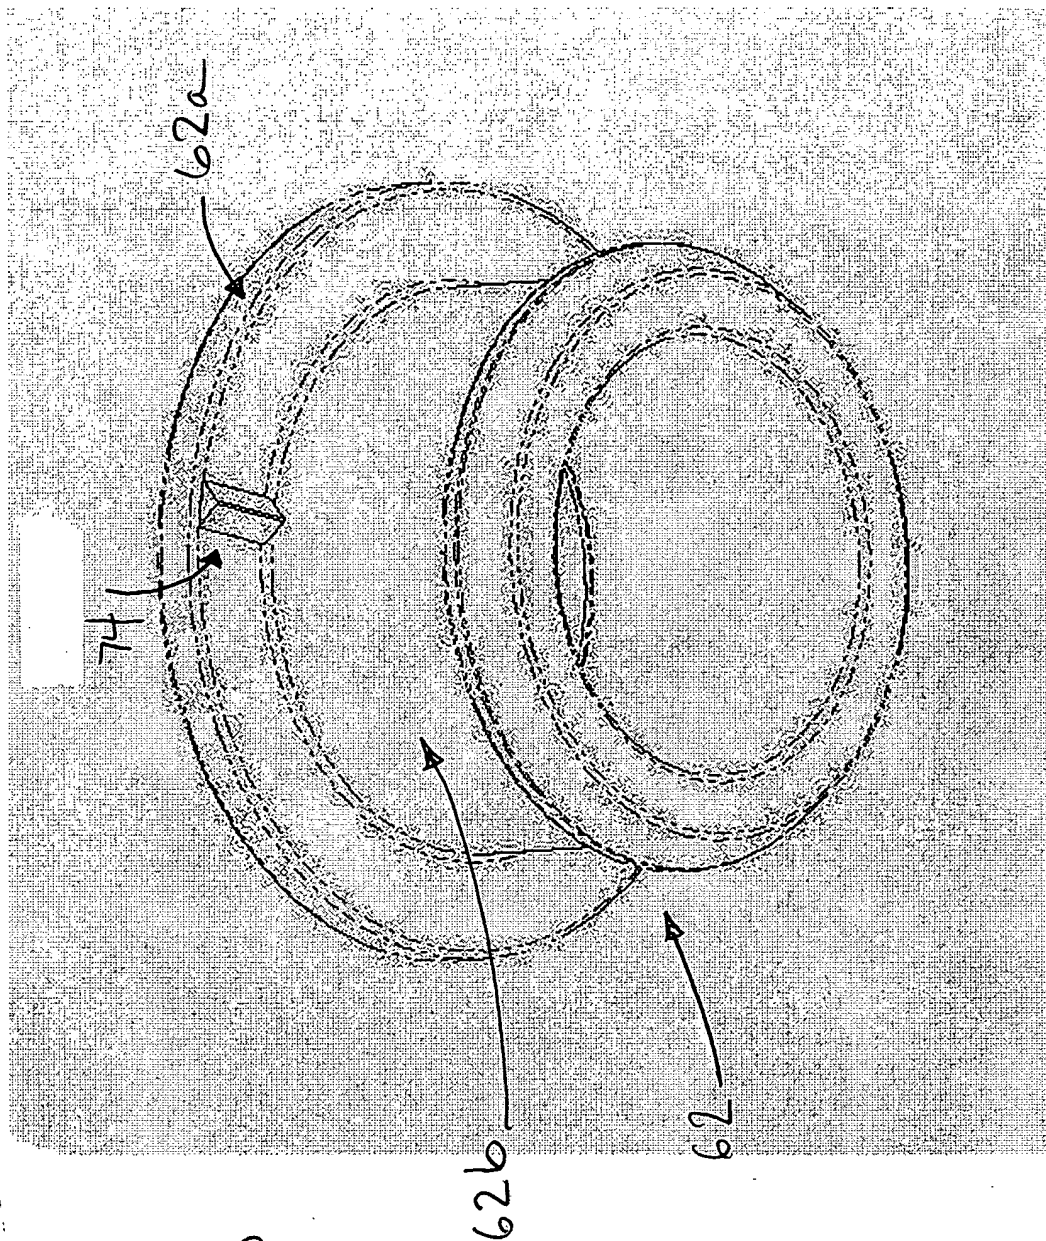




FIG. 56 is a perspective view of the device 100 in a closed position, showing the handle 20 and the needle 66. The handle 20 includes a proximal end 22 and a distal end 24. The needle 66 is attached to the distal end 24 of the handle 20. The device 100 is shown in a closed position, with the needle 66 retracted into the handle 20. The handle 20 includes a proximal end 22 and a distal end 24. The needle 66 is attached to the distal end 24 of the handle 20. The device 100 is shown in a closed position, with the needle 66 retracted into the handle 20.

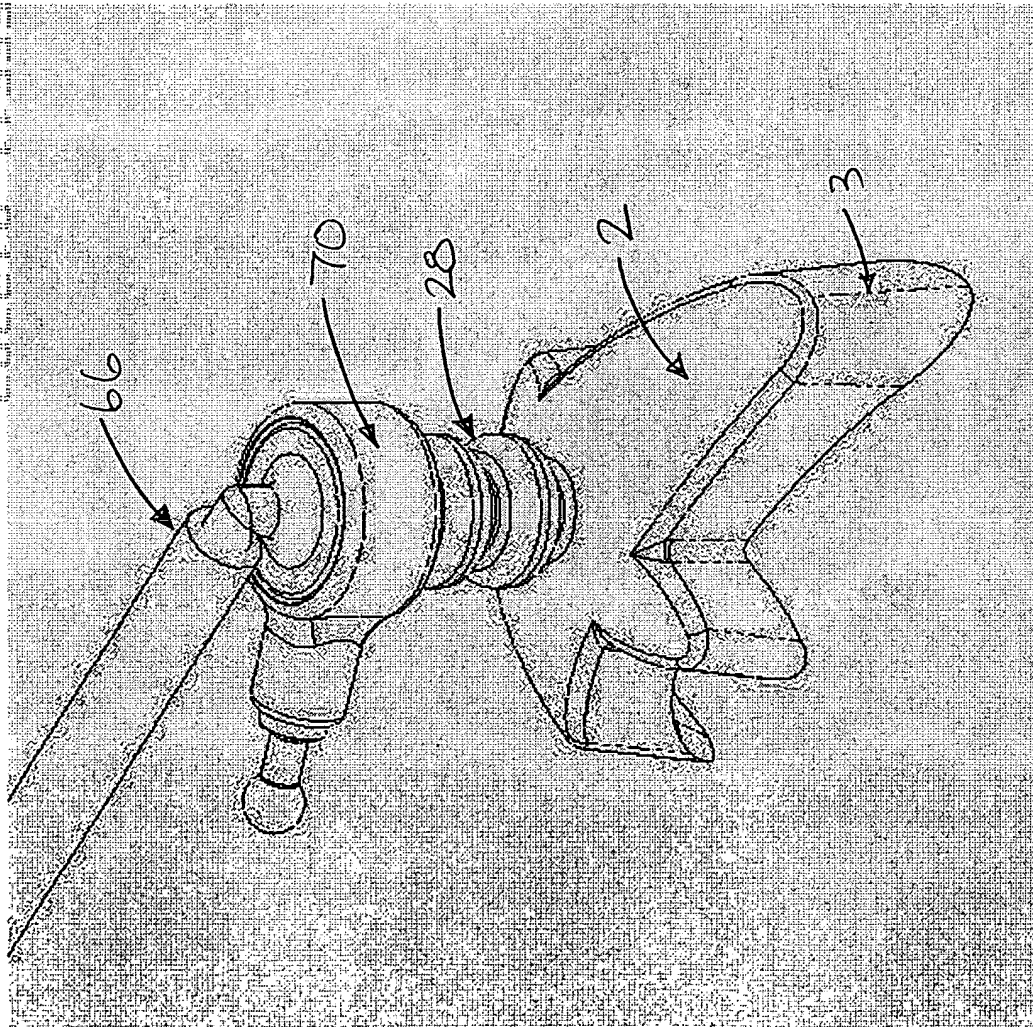


FIG. 56

FIG. 57a

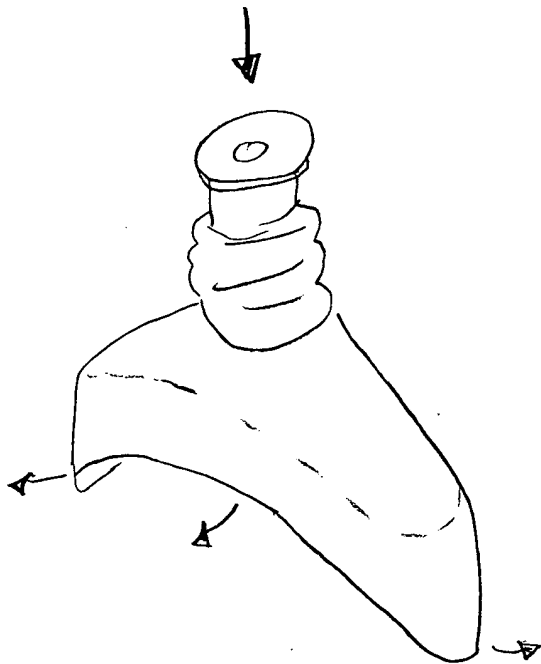


FIG. 57b

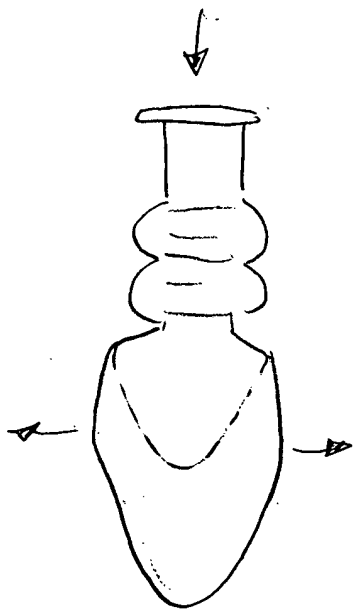
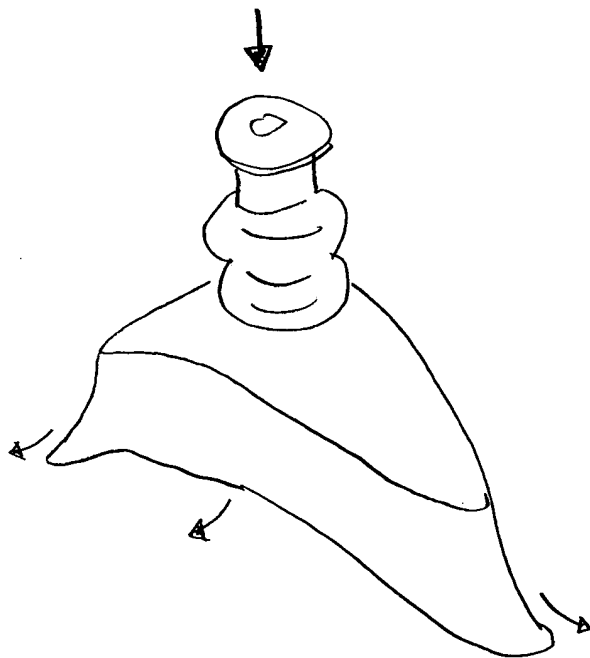


FIG. 58a

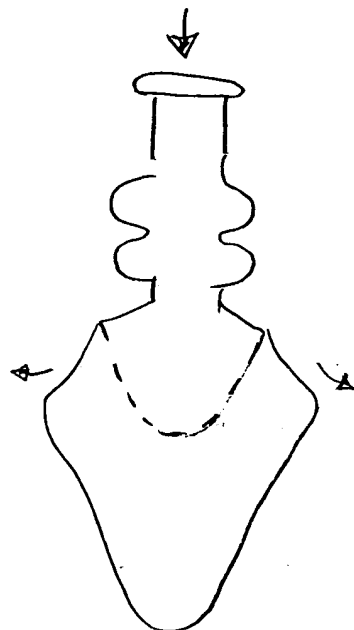


FIG. 58b

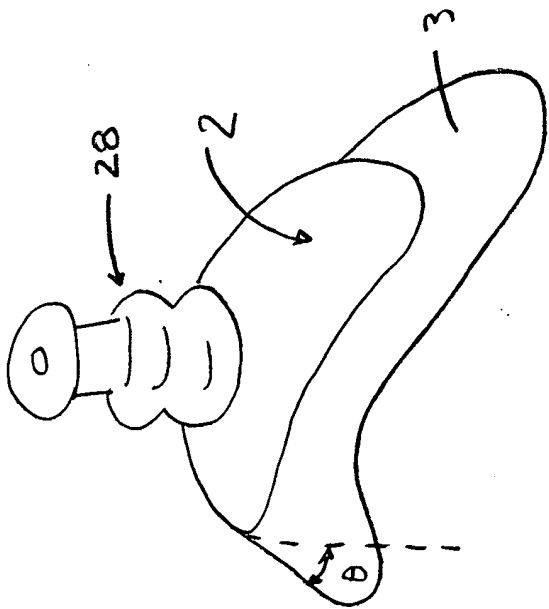


FIG. 59a

FIG. 59b

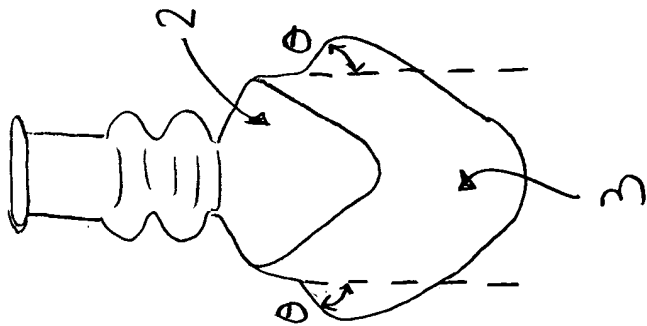
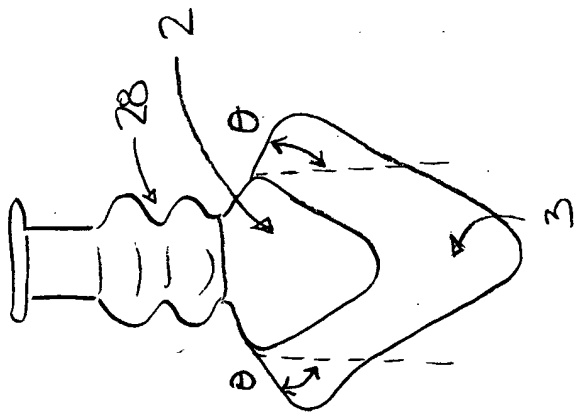


FIG. 59c

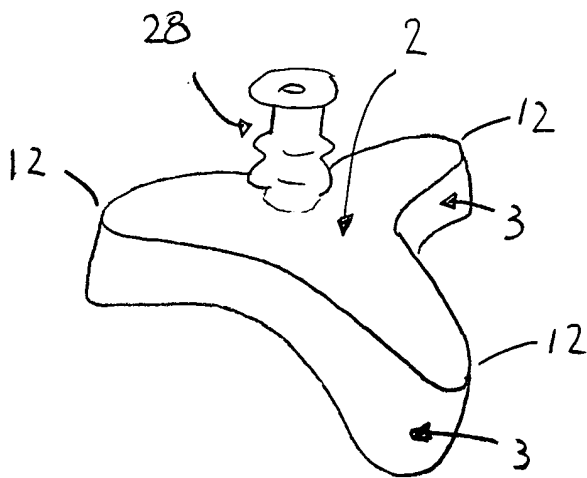


FIG. 60a

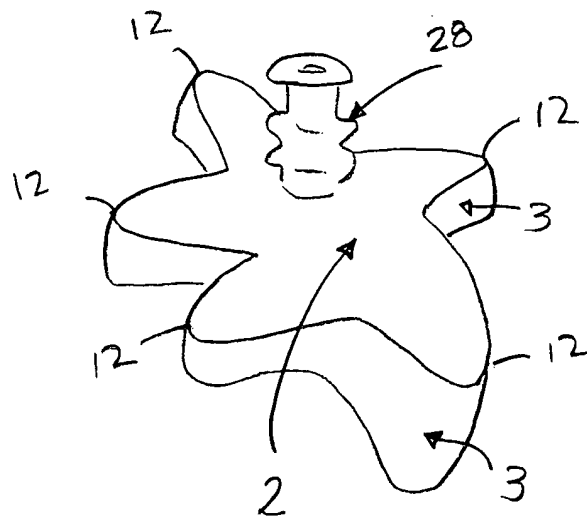


FIG. 60b